

INSIDE SOUND



PROFESSIONAL LOUDSPEAKERS



20 YEARS OF SOUND INNOVATION



## **SOUND IS BEAUTY AND EMOTION**


---

Vibrations moving through the air taking completely the mind. Amplifying these emotions for FaitalPRO is a commitment which goes beyond professionalism. It's an inborn passion: the privilege of working in an environment that IS art, genius and excitement and which is corresponded by FaitalPRO with precisely the same enthusiasm, respect and admiration.



# A BIT ABOUT US

Faital's history reflects constant development and growth over the last 60 years. The various milestones that have been achieved since the Company was established in 1958 have allowed it to become an important point of reference in the world markets.

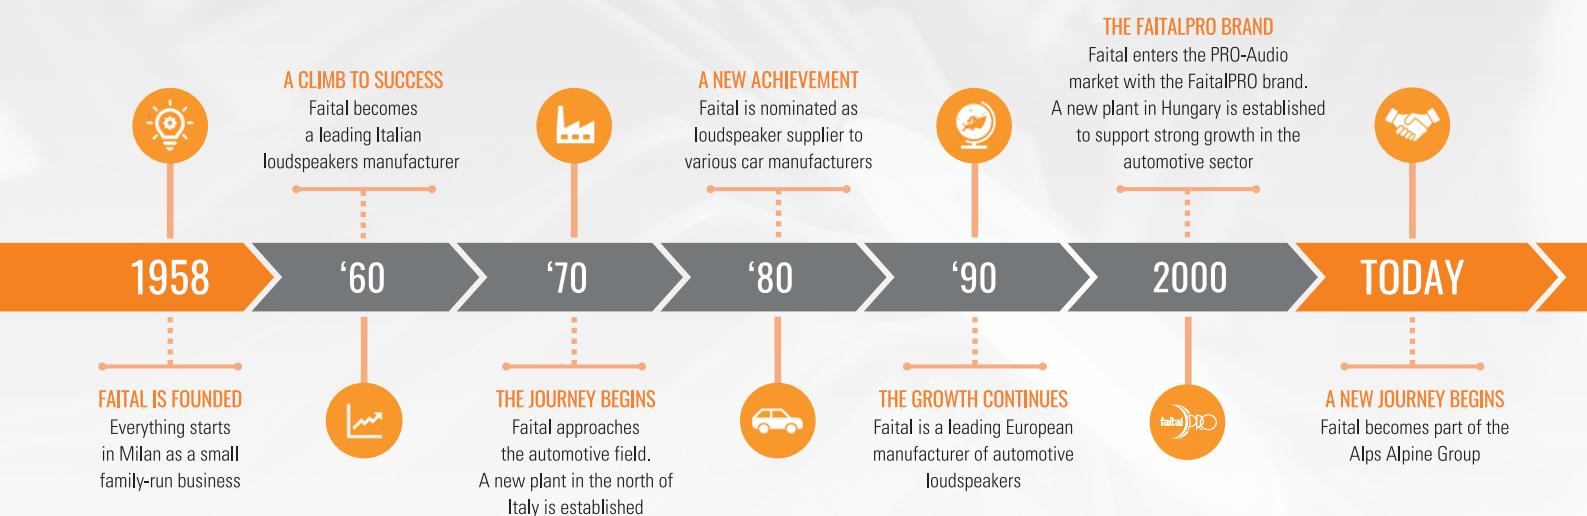

## TODAY

Holding strong to the fundamental passion for good sound driving its evolution since inception, Fital incessantly pursues its core values, Technological Development, Total Quality, Customer Service and Competitiveness.

FitalPRO is an affirmed brand of Professional Loudspeakers specifically designed for the most demanding Professional Audio applications and manufactured combining superb craftsmanship with the latest industrial technologies. FitalPRO stands for superior loudspeakers, expressing the highest standards of reliability and sound quality available on the market today.

### 1960s



Fital S.p.A. is founded in Milan in 1958 as a small family-run business. At the end of the 60s, Fital becomes one of the main Italian loudspeaker manufacturers, accounting for 40% of national demand. Fital initially manufactures loudspeakers for radios and audio systems and later introduces its products into the market for television amplifier systems. As a result of constant technical and business development, the company gradually expands to cover many areas of industry.

### 1970s



Fital enters the automotive field and ventures beyond national boundaries with their first European clients. In order to satisfy increasing market demand and their new European clients, in 1974 the company opens a new plant in Chieve, near Crema, Italy.



### 1980s



The growth trend continues. Fital becomes the official loudspeaker supplier to various car manufacturers. The company undertakes a innovation and technological development process with investments aimed at updating plants and enhancing the areas of R&D and Human Resources. The company commits to TOTAL QUALITY and sets their main objective as "Zero Defects".

### 1990s



In the early 1990s, Sofaital S.A. is established in France and a new plant is opened, in Argenteuil, near Paris. A few years later, FAITAL contributes to the establishment of a new manufacturing facility in Vacarisses, Spain near Barcelona. With the addition of Sofaital in France and Fabrica Iberica in Spain, the Fital Group becomes the leading European manufacturer of loudspeakers for the automotive industry. The Group considers with increasing interest the possibility of entering the North American market.

### EARLY 2000s

In the new millennium, the company enters the North American market and begins to meet local market requirements. Fital consolidates its achievements after almost half a century in business. In order to enter the North American automotive market successfully, the company establishes a commercial office and a new warehouse in New Jersey to provide logistical support to its clients. Similarly, to increase its capacity and competitiveness, Fital establishes a new manufacturing facility in Hungary and a new sales & logistics center in Hong Kong to support its Asian clients.

The early 2000s also mark the beginning of a diversification strategy for Fital that leads to the development of the FitalPRO brand.

# HOW WE DO WHAT WE DO

## R&D AND MANUFACTURING BY FAITAL

Every FaitalPRO driver is meticulously designed using the latest CAD and FEA modelling techniques. All electro-acoustic and mechanical performances are simulated and then carefully studied by a team of "sound fanatic" engineers. The individual parts of each loudspeaker are directly designed in this way, in order to ensure that the end product will meet the Client's electro-acoustic and environmental requirements and special attention is given to compliance of the finished product with environmental requirements and international standards.

### Design

Creating a loudspeaker system involves a combination of design, technology and sensory considerations. Emotions, communicated by listening to an audio system, are the result of a complex process. Faital's Research and Development laboratory is a centre of excellence in the fields of research, planning, development, testing and support for the manufacture of loudspeaker systems.



In the following pages, Faital will take you on a guided tour of the various stages involved in manufacturing its products, which is undoubtedly part of one of the most advanced processes in the industry. You will be able to experience first-hand the commitment, expertise and quality that underline each of our products.

### OEM Co-Design

The major component of an audio system is the enjoyment that it transmits to the end user. This is the result of work that begins early on, once design models are ready. Initially customers' requirements are clearly defined. Therefore, Faital works in synergy with the customers right from the beginning. A number of meetings are required with the customer and the other suppliers involved in the project, in order to outline an initial concept of what the loudspeaker system will be like. A work group is set up within Faital, with representatives from all company departments, including design, sales, purchasing, quality, production and logistics. Based on their work, valuable suggestions will be proposed to the customer during the project, as well as strict quality control criteria at each stage of the project. Firstly the type, number and size of loudspeakers in the audio system need to be determined, as well as their position in relation to listeners in a room or in an open environment. The performance of the sound system will largely depend on this positioning, which is often the result of an optimisation based upon the customer design choices and needs.

### CAD System

At the design stage, work begins on drawing individual loudspeakers and their specific components using three-dimensional modeling software. In order to do this, both Faital and the customer can use compatible software and quickly exchange files containing the drawings. Faital currently has 8 workstations and is able to carry out drawings using three different CAD systems: CATIA, Autocad and NX. At the same time, an electro-acoustic simulation of the various loudspeakers in development is carried out using "Finite Element Analysis" software based on the required physical and dimensional parameters, this way their acoustic performance can be predicted before they are built in the laboratory. The materials and single components that will be used are also tested using engineering simulation software. Faital has also acquired over the years the ability to create a feedback system that enables the R&D dept to feed actual performance data into the FEA system which in turn is constantly becoming more precise and reliable.



### Prototyping

When the process of drawing and defining the technical characteristics of the various parts of the new models designed has been sufficiently consolidated, Faital builds the first version of the loudspeakers. This phase is achieved by the construction of pilot tools or the use of rapid prototyping techniques, such as laser sintering of baskets, so that parts very similar to the final ones can be quickly assembled.

The first prototypes can then be measured to verify that all electrical and acoustic parameters comply with the initial design specifications. At this stage the work-group assigned to the project, co-ordinated by the project leader, can predict reliability problems in the final product using third-generation DFMEA methods. In addition, aspects relating to the industrial manufacturing of individual parts can be assessed, providing an initial outline of production flow and defining any special manufacturing equipment that will be required.

This verification stage is extremely important because, in addition to allowing the required adjustments and changes to be made to the loudspeaker designs, it provides an opportunity to present useful suggestions to the R&D dept or the customer for improving the overall product and the final application.

All problems arising at this point and any changes that need to be made to individual parts are discussed at constant inter-functional progress meetings. This allows to assess their possible impact, both economic and industrial making use of advanced PFMEA's for a detailed reliability evaluation, all the while ensuring that development deadlines are met. At this stage the customer can also be involved so that any changes to the initial technical requirements can be evaluated and agreed upon.

### Off Tool Parts

Once this stage has been completed, work can start on the production of final tools and equipment for the manufacture of all parts. Attention is now focused on second-level suppliers and production methods: purchasing, quality of suppliers and production methods, play an important role in this stage. At the proposed production plant an initial review of the manufacturing process for the loudspeaker being developed is carried out. This allows control plans and production flow process to be optimized by clearly identifying process variables. On receiving final of tool parts and equipment, the supplier quality department and the laboratory carry out a key role once again. While the laboratory undertakes manual assembly of all loudspeakers required for the audio system in order to verify their compliance with project specifications, the quality department "certifies" the quality of supplies. This is carried out using the pre-series products in accordance with similar criteria as to that required by the end customer. This process continues even after mass production start up and is based on a continuous performance-monitoring plan.





## Acoustic Testing

In addition to instrumental testing, the prototypes produced in the laboratory are also subjected to a series of tests ranging from installation testing to dimensional compatibility, as well as verifying their acoustic performance. Final adjustments could still be possible at this stage by fine tuning and implementing minor changes, this way the final characteristics of the manufactured product can be finally set. Sound is evaluated by tests using instruments and through a series of listening sessions carried out by specially trained engineers. Carefully selected pieces of music are used in order to highlight specific features of the audio system's acoustic performance. The listening tests are also compared with audio recordings that have been made in a reference environment, such as a state of the art listening room.



## Pre-Series Production

When the results that have been achieved are considered satisfactory of all technical requirements, a pre-series production is undertaken at the manufacturing plant chosen for the project. This allows for verification that the products manufactured in the final production process comply with the initial project specifications. Pre-series production, which is carried out using the final manufacturing equipment and components on the proposed manufacturing line is also subjected to product and process validation carried out by the R&D laboratory. This marks the beginning of product and process validation both of which aspects are subject to careful quality control. At this point the plant committee, along with the engineers from the R&D laboratory, carries out an initial review of the effectiveness of the production processes that had been previously planned. At this stage a verification is carried out to ensure that process variables are under control, based on accurate measurements and using appropriate statistical methods. Any deviations or problems that are found generate immediate feedback regarding the project, in addition to the necessary corrective action being taken in relation to the product, processes and suppliers.



## Validation Testing

The loudspeakers from the pre-series production are also used for validation testing, which is carried out by Faital's R&D dept. The tests used to verify the reliability and performance of loudspeakers during their lifecycle vary enormously from customer to customer and from application to application. Faital, having acquired an invaluable experience in this area, is able to share its know-how with customers by suggesting the most appropriate solutions and methods if needed. Faital has for some time implemented a series of routine activities for the validation process of products; these activities include salt fog tests, life tests, temperature shock, humidity, UV exposure and vibration test either carried out singularly or combined together, as well as all the most advanced electro-acoustic measurements, including linear parameters measurement, large signal identification, thermal behaviour, suspension part measurement and scanning vibrometer systems. All these activities result in a detailed report completing the validation phase.



## Production

The project has been completed. From this point on, the production department is responsible for ensuring that production volumes required are met and verified using R@R (Run @ Rate) tests, in accordance with product characteristics set in the project specifications. Production processes are verified and optimized through continuous quality control on the production line. All loudspeakers manufactured by the Faital group are fully checked at the end of the assembly line. Loudspeakers are tested individually also using proprietary computerized equipment, which verifies in real time six electro-acoustic parameters relating to nominal use conditions specific to each product. Defective items are always set aside for careful analysis and possible feedback to the R&D dept. Quality Assurance and the Plant Committee continuously monitor production progress. In the case of non-conformities or deterioration in the level of production rejects, corrective actions, either internal or relating to suppliers, are identified and implemented. In addition, a general management committee oversees the progress of all Faital plants globally, in order to ensure that a uniform level of product quality is achieved wherever a product is manufactured. Most of a product is emotion and Faital ensures the emotion of a perfect sound.

## FaitalPRO Products

The use of NdFeB throughout the entire range of FaitalPRO drivers allows for an important weight reduction. In fact, when confronting ferrite and NdFeB magnets with the same magnetic induction in the gap, the results show that NdFeB transducers weigh from 3 to 6 times less than ferrite. This aspect is an evident advantage for manufacturers of speaker boxes allowing them to design products that are easier to move and to implement in projects with simpler structures for speaker support and fixing points. The same concept can be considered for Line Array applications that use numerous transducers in modular blocks. The complete FaitalPRO line of drivers is produced using state of the art materials. Our team of engineers design all acoustical components as well as all hard parts. A special heat dissipation system, designed by our R&D team, allows outstanding power handling capability while improving the drivers' reliability. Cones and suspensions, as well as voice coils, undergo a special treatment in order to provide reliable performance even in the most severe environmental conditions. The specifically selected adhesives and the curing phase during the production process are a guarantee for product reliability and durability. The entire line of FaitalPRO drivers has been tested and verified to withstand the most severe working environments. . With this in mind Faital has chosen to carry out life tests in accordance with the severe AES 2 - 1984 Rev.2003. norm. Every FaitalPRO driver is manufactured combining superb craftsmanship with the latest industrial technologies and rigorous tests are constantly performed during quality checks. All driver components are put through continuous visual, mechanical and electrical tests to verify their conformity to the design parameters. This procedure is in place to keep production tolerances within very tight limits ensuring consistency in quality and reliability over time. As quality and environmental protection are of utmost importance to us, Faital has been certified for many years in accordance with the following international standards:

- IATF 16949
- ISO 9001
- ISO 14001
- ISO 50001



# "BEHIND THE SCENES" OF A PROJECT BY FAITAL

## The Design of a magnet assembly

The magnet assemblies of all products in the FaitalPRO range are carefully designed to guarantee the nominal performance of each loudspeaker during its lifetime.

Detailed simulations using FEA techniques have allowed evaluations to be made on both flux density as well as thermal equilibrium. The presence of high temperature in the magnet assembly is a result of the voice coil overheating. This, in turn, is linked to the Joule effect produced by the current that circulates in the coil windings on the basis of the power supplied from the source and the electro-acoustical yield of the loudspeakers itself. For this reason a great deal of attention has gone into designing products capable of efficiency ( $\eta_{\text{a0}}$ ) in the area of 2.70% - 3.00%. Furthermore the magnet assemblies have been conceived to have a double function: guaranteeing performance and, at the same time, contributing and optimizing the coil heat dissipation. This takes place by maximizing the surface area available for heat exchange of the voice coil in the air gap, easing the thermal radiation, and quickly transporting the absorbed energy to the aluminum basket.

Great care has been taken in the design phase to allow for the correct distribution of the magnetic flux within the air gap and avoiding areas of saturation in the iron parts of the magnet assembly itself.

## Thermal behaviour of the voice coil

The voice coils have been designed to withstand high temperatures (up to 240° C on the windings) as well as the mechanical stress of the support during normal use. For this reason the material chosen for the former is glass fiber. A special joint has also been designed to ensure that the correct cylindrical shape is maintained. The coil windings are positioned to form two layers, one on the outer surface and the other on the inner surface of the former. This doubles the surface area available for heat exchange from the coil to the magnet assembly.

This way heat dissipation by convection is also made easier. The airways inside the magnet assembly have been studied to make the outward movement of dissipated energy as efficient as possible. This is helped by the geometry of the magnet assembly and the specific structure of the base of the speaker basket itself. The movement of the mobile parts of the speaker allows the hot air to be forced out, especially in the frequency range under 400Hz.

The thermal energy generated by the coil in free air is approximately 2.5 x 108 W/m<sup>3</sup>. Exceeding this limit during the design phase will certainly result in the destruction of the coil in a real application. This parameter therefore constitutes a fundamental aspect in regards to reliability and has been taken into consideration in the design phase of the magnet assembly and the definition of the maximum power associated with each model of speaker in the range.

The application of energy dissipation techniques is another measure that guarantees the reliability and performance during the products' life.

## Electro-acoustical behaviour

FEA analyses allow the dynamic behaviour of a magnet assembly to be studied. In this way it is possible to study the Eddy currents calculating the loss and the impedance. In parallel an analysis is carried out on the compliance and the non-linearity of the spider using specific instruments. Consolidating together the data obtained allows for a final analysis that simulates the behaviour of the loudspeaker at low frequencies. This is carried out using another one of Faital's simulation tools called "Data Processing Engine", allowing for the prediction of resonance frequency, excursion, distortion, and other loudspeaker parameters.

The structural analysis and frequency response, permits the acoustical verification to be completed. This also permits to define, at a design level, all necessary parameters for acoustical optimization.

## Experimental tests and reliability

The parameters previously simulated are used as the starting point for a performance verification of all the components that make up a FaitalPRO transducer. Once the speakers are made using definitive production tools Faital carries out an in-depth laboratory activity of each component's performance. The objective is to verify that every product in the FaitalPRO range corresponds to the design parameters.

Particular attention is paid to the verification of:

- Magnetic properties
- Electro-acoustical characteristics
- Mechanical performance
- Climatic and environmental performance
- Reliability and product life

Faital's 50 years of activity has allowed the company to consolidate its experience. Working in markets where defects are calculated in ppm (parts per million) and every product issue causes a series of costs that are much higher than the cost of the individual loudspeaker, Faital has invested in the latest technology and instrumentation allowing this kind of verification to be carried out. Faital's Research & Development Department has at its disposal three anechoic chambers with integrated and computerized instruments capable of satisfying any requirement from the market. When it comes to reliability and products' capabilities to maintain and guarantee the performance for which they were originally designed, Faital's position is to go beyond the standard criteria used and to test all its products with a far greater level of severity. With this in mind Faital has chosen to carry out life tests in accordance with the severe norm AES 2-1984 Rev. 2003, that requires the driver to function in free air for 2 hours at nominal power, powering the unit with DIN filtered Pink Noise. This test is by far more severe than that normally used by our leading competitors who usually test their speakers for a much lower number of hours as well as fitting the speaker in a vented acoustic box. The tests carried out allow Faital to face the Professional Audio market with the guarantee of offering its clients a complete family of transducers that are in line with the highest market standards and that are produced using the most advanced technologies. All the products are designed at Faital's headquarters and main R&D laboratory in S. Donato Milanese, near Milan in Italy. The woofer's production takes place at Faital's Manufacturing plant in Chieve, about 40 Km from the company's headquarters. The compression drivers are produced in Spain near Barcelona in the Vacarisses plant. All of Faital's plants are certified ISO TS16949:2009, ISO 14001:2004, ISO 9001:2008.

## FaitalPRO Range

The range comprises a complete series of woofers, compression drivers and horns in every category the market needs be it equipped with Ferrite or Neodymium magnets. These products are only a starting point, in fact Faital's intention is to expand and improve the entire FaitalPRO line of products with the goal of continuing to satisfy even the most demanding clients. In order to achieve this goal Faital will continue to invest in its research R&D and will maintain the production sites updated by continuously applying the latest technologies.





# ECO-CONSCIOUS

*by Faital*

## SOLAR ENERGY

### THE NEXT STEP FORWARD FOR FAITALPRO!

**Pressing on with our environmental efforts, we at Faital added to our already highly technological profile an ecologically conscious approach by harnessing solar power.**

The Chieve plant, in the Cremona province, is the location chosen by Faital to install the manufacturing operations for the entire range dedicated to the professional audio world, in other words, the FaitalPRO division. This modern manufacturing facility has constantly sustained technological innovation over time and is now equipped with a powerful photovoltaic system of extremely modern conception which is, above all, **dedicated to energy savings and reducing Faital's Carbon footprint.**

Initially opened in 1978, the Chieve production plant has continuously been updated following and at times even anticipating the most advanced technological trends, including the installation of highly automated production lines, that guarantee the accurate reproduction and consistently high quality of the entire pro-audio range. The Chieve plant roof presented the ideal layout and orientation for the solar panels planned for this project. This new power generation system was designed and built to achieve outstanding production efficiency - thus significant savings – as well as to continue on Faital's pursuit for always more "ecologically conscious" operations and guaranteeing FaitalPRO's ever "greener" signature. In fact, Faital states that on a power level, this new installation is aligned with the global policy for energy savings in terms of consumption and it is not by chance that this photovoltaic system was **designed to cover 40% of the internal energy requirements.** On the other hand, from the increasingly important ecological point of view, the new system will also prevent dumping several tons of harmful CO<sub>2</sub> into the atmosphere every year.



The system's installed capacity is 199 KWp with an annual estimated contribution of **210,000 kWh**, equivalent to about 40% of the Chieve plant's current annual consumption. The official data indicate a significant savings of carbon dioxide released into the atmosphere, almost 111,000 kg per year, which means **sparing more than 2,000 metric tons of CO<sub>2</sub> emissions** over the next 20 year.

The system was officially activated the last week of June 2012 and the entire installation was completed in a record two months time. In all the setup includes 848 polycrystalline panels (Sovello Pure Power L with 235 Wp each and a guaranteed output for at least 25 years) and eight Delta Solivia 20TL inverters, all Made in Germany.

With a useful life of over 25 years, this system is the latest step forward in **Faital's long term and long established consideration for the safety of the environment.**

# ENVIRONMENTAL COMPLIANCE

Over the years Faital has always stayed ahead of the European Union's environmental requirements. Continuous studies and implementation of changes and controls are aimed at guaranteeing a lower impact on the environment of all Faital processes. This led to the attainment of the important and certainly not widely awarded ISO 14001, a certification that is exclusively bestowed on companies that respect very stringent, specifically defined "environmental management requisites" and that is not a requirement but a voluntary act of those who seek coherent, efficient and sustainable improvement in environmental protection matters: a certification with the goal of - "establishing/implementing/actively maintaining/improving a system of sustainable environmental management".

Faital S.p.A. is committed to complying with all applicable laws and regulations, including the European Union's Waste Electrical and Electronic Equipment (WEEE) and Restriction of Hazardous Substances (RoHS3) directives.

## WEEE Directive (2012/19/EU)



The WEEE Directive (2012/19/EU) The Waste Electrical and Electronic Equipment Directive (WEEE) of the European Parliament and of the Council of July 4th, 2012 applies to companies that manufacture, sell, distribute, recycle or treat electrical and electronic equipment to consumers in the European Union (EU). It covers all large and small household appliances, IT equipment, radio and audio equipment, electrical tools and telecommunications equipment. The Directive aims to reduce the waste arising from electrical and electronic equipment and to improve the environmental performance of all those involved in the life cycle of these products.



## RoHS3 Directive (2015/863/EU)

Commission Delegated Directive (EU) 2015/863 of 31 (March 2015) amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council as regards the list of restricted substances. It affects manufacturers, sellers, distributors and recyclers of electrical and electronic equipment containing: Cadmium (Cd), Lead (Pb), Mercury (Hg), Hexavalent Chromium (Cr VI), Polybrominated Biphenyls (PBB), Polybrominated Diphenyl Ethers (PBDE), Bis(2-Ethylhexyl) phthalate (DEHP), Benzyl butyl phthalate (BBP), Dibutyl phthalate (DBP) and Diisobutyl phthalate (DIBP).

FaitalPRO has established a number of Project Teams to assess implementation alternatives and to understand the supply chain issues associated with conformance to these Directives.

These teams are working with our suppliers to ensure that RoHS3 compliant materials are provided and do not adversely impact the quality and reliability of our products. In addition, these teams oversee several complex engineering projects to ensure that our manufacturing processes continue to meet our high quality standards after the transition has been made. Material composition data and certification is continuously being collected/updated for all components and parts and are available upon request.

**FaitalPRO processes and products fully comply with both the WEEE and the RoHS3 directives.**

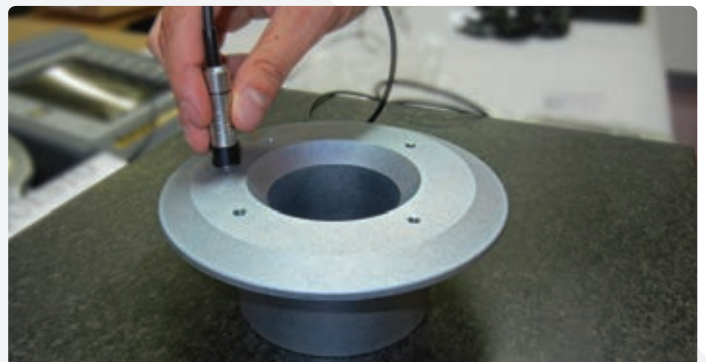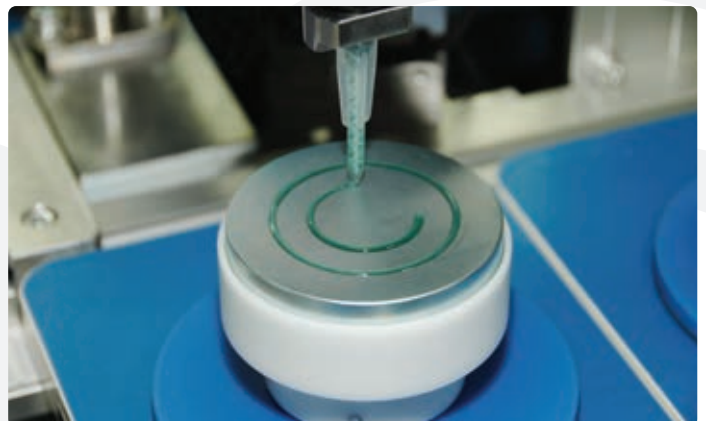

If you have any specific questions with reference to WEEE or RoHS3 status for any FaitalPRO product or Faital's efforts with respect to complying with WEEE and RoHS3 compliance, please contact your local representative. A full list is available on the FaitalPRO website **[www.faitalpro.com](http://www.faitalpro.com)**.



# HF DRIVERS

## TECHNOLOGY AND PASSION

Every FaitalPRO driver is meticulously designed using the latest CAD, 3D and FEA modelling techniques. Every electro-acoustic and mechanical performance is simulated and then carefully designed by a team of engineers whose only passion is sound. We put the most advanced technologies and materials at your service.

# HF2000

2" - 100 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	50.8 mm (2 in)
Overall Diameter	130.5 mm (5.14 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	83.5 mm (3.29 in)
Net Weight	2.67 kg (5.9 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	2.9 kg (6.4 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power above 0.9 kHz (1)	100 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	200 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	3.2 mm (0.13 in)
Flux Density	1.95 T
Magnet	Neodymium Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	30° Conical
NET Air Volume filled by HF Driver	0.6 dm³ (0.021 ft³)

- NOTES:** Driver mounted on a 2" 90° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

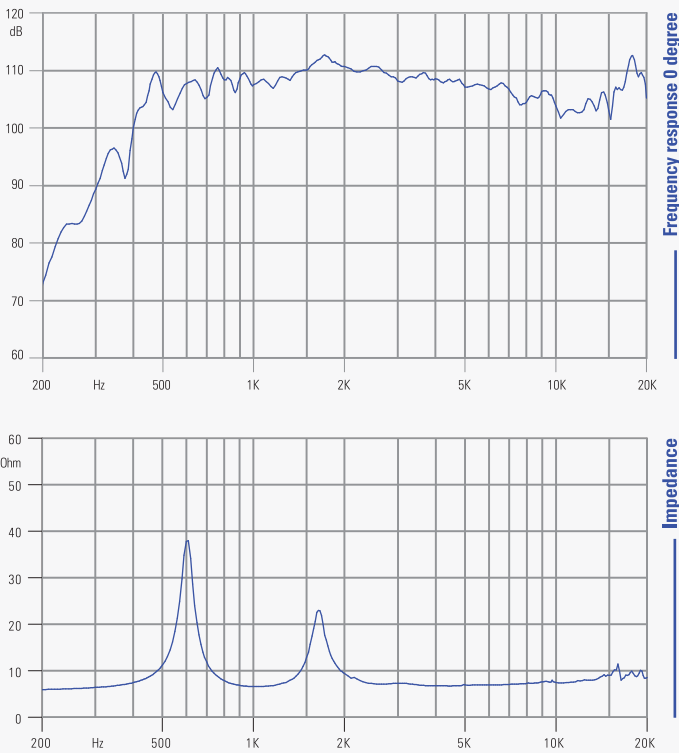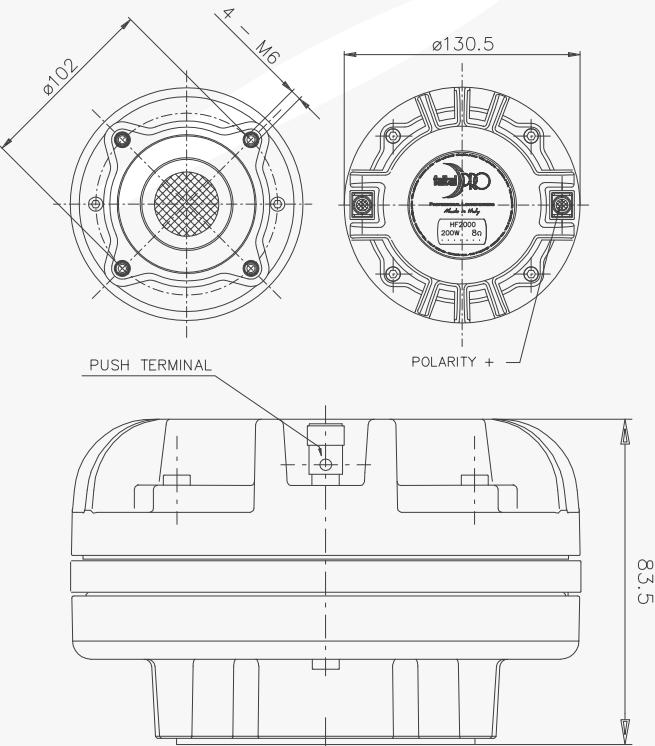



# HF201

2" - 100 W - 108 dB





NOMINAL SPECIFICATIONS

Throat Diameter	50.8 mm (2 in)
Overall Diameter	170 mm (6.69 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	66 mm (2.60 in)
Net Weight	4.6 kg (10.2 lb)
Shipping Box	195 x 195 x 141 mm
(Single Carton Box)	(7.7 x 7.7 x 5.6 in)
Shipping Weight	4.8 kg (10.6 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7.2 Ω
AES Power above 0.9 kHz (1)	100 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	200 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	108 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	3.2 mm (0.13 in)
Flux Density	1.7 T
Magnet	Ferrite Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	36° Conical
NET Air Volume filled by HF Driver	1.05 dm³ (0.037 ft³)

- NOTES:** Driver mounted on a 2" 90° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

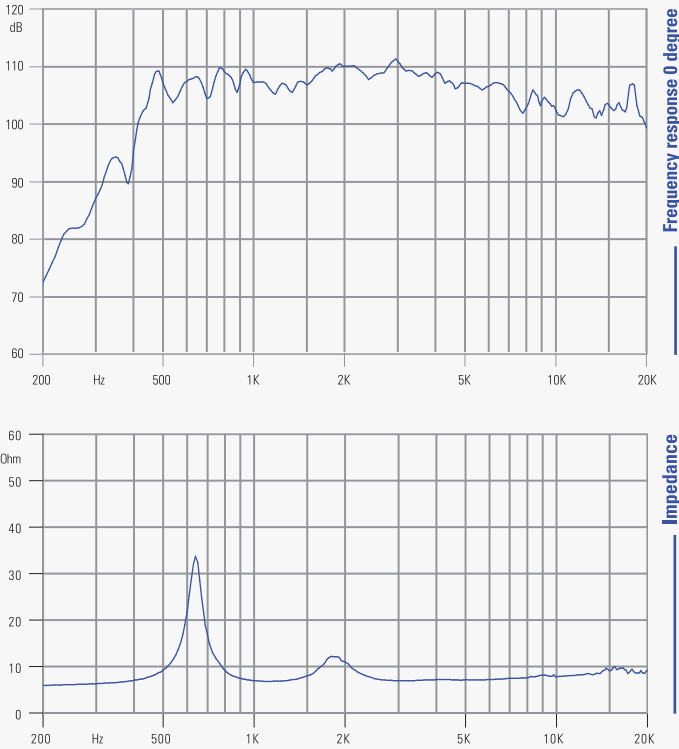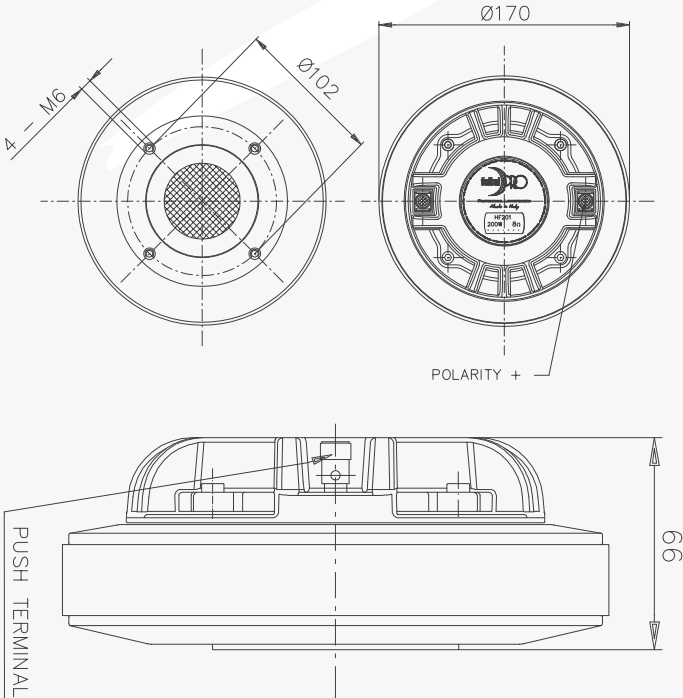

# HF200

2" - 70 W - 109 dB





NOMINAL SPECIFICATIONS

Throat Diameter	50.8 mm (2 in)
Overall Diameter	130.5 mm (5.14 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	95 mm (3.74 in)
Net Weight	3.2 kg (7.1 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	3.4 kg (7.5 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	5.8 Ω
AES Power above 0.9 kHz (1)	70 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	140 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	2.8 mm (0.11 in)
Flux Density	1.8 T
Magnet	Neodymium Slug Crown
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	24° Conical
NET Air Volume filled by HF Driver	1.10 dm³ (0.039 ft³)

- NOTES:** Driver mounted on a 2" 90° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

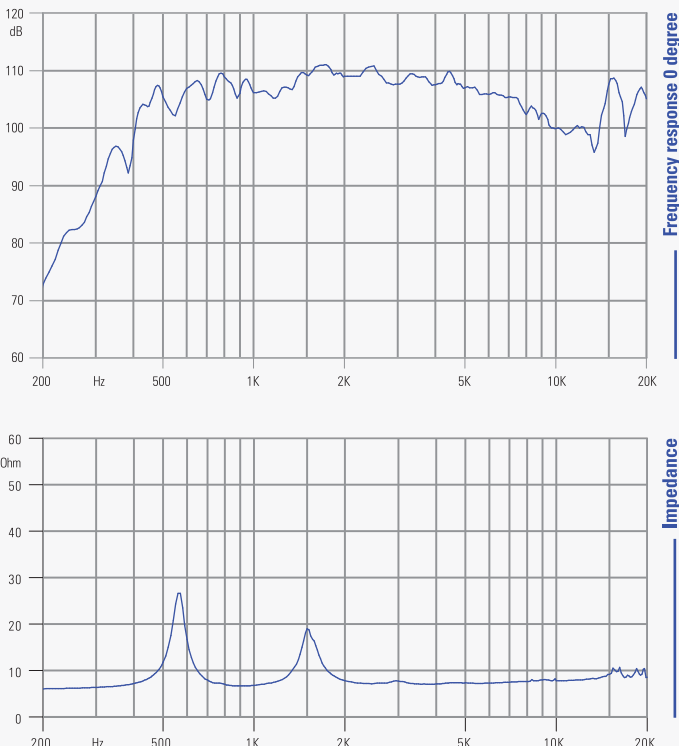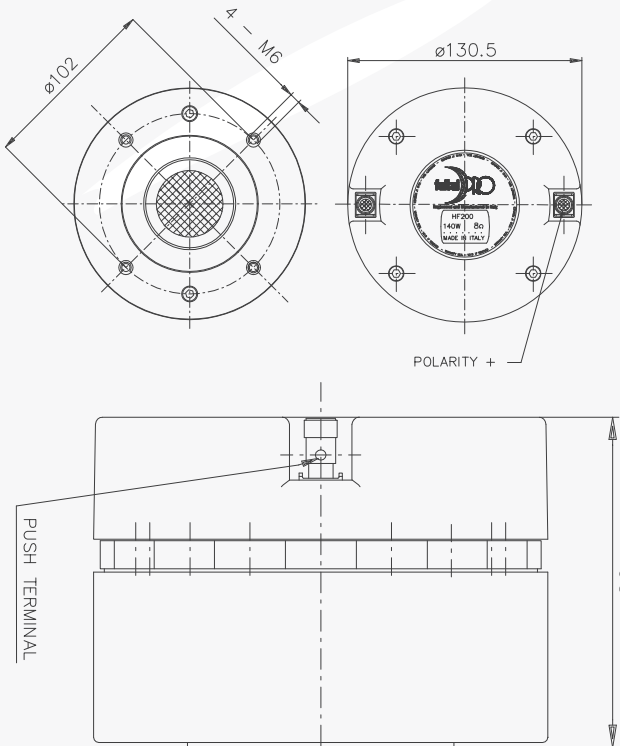



# HF204

2" - 80 W - 108 dB

# HF206

2" - 80 W - 109 dB



### NOMINAL SPECIFICATIONS

	HF204	HF206
Throat Diameter	50.8 mm (2 in)	50.8 mm (2 in)
Overall Diameter	130.5 mm (5.14 in)	130.5 mm (5.14 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)	102 mm (4.02 in)
Depth	91.5 mm (3.60 in)	91.5 mm (3.60 in)
Net Weight	2.3 kg (5.1 lb)	2.3 kg (5.1 lb)
Shipping Box	185 x 170 x 122 mm	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	2.6 kg (5.7 lb)	2.6 kg (5.7 lb)

**NOTES:** Driver mounted on a 2" 90° x 40° Al horn

(1) 2 Hours Test According to AES 2-1984 Rev. 2003

(2) Maximum power is defined as 3 dB greater than nominal power.

(3) 12 dB/oct or higher slope high-pass filter.



(4) Averaged within the frequency range.

(5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

### TECHNICAL PARAMETERS

	HF204	HF206
Nominal Impedance	8 Ω	8 Ω
Minimum Impedance	7.2 Ω	7.4 Ω
AES Power above 0.9 kHz (1)	80 W	80 W
AES Power above 0.65 kHz (1)	40 W	40 W
Maximum Power above 0.9 kHz (2)	160 W	160 W
Maximum Power above 0.65 kHz (2)	80 W	80 W
Minimum Crossover Frequency (3)	0.9 kHz	0.9 kHz
Sensitivity (1W/1m) (4)	108 dB	109 dB
Frequency Range	0.5÷18 kHz	0.5÷18 kHz
Voice Coil Diameter	65 mm (2.56 in)	65 mm (2.56 in)
Winding Material	Al	Al
Former Material	Kapton	Kapton
Diaphragm Material	Ketone Polymer	Ketone Polymer
Diaphragm Shape	Dome	Dome
Winding Depth	3 mm (0.12 in)	3 mm (0.12 in)
Magnetic Gap Depth	4.2 mm (0.17 in)	4.2 mm (0.17 in)
Flux Density	1.7 T	1.7 T
Magnet	Neodymium Slug Crown	Neodymium Slug Crown
Re	5.5 Ω	5.5 Ω
Phase Plug Design	Annular	Annular
Exit Angle (5)	30° Conical	30° Conical
NET Air Volume filled by HF Driver	0.75 dm³ (0.026 ft³)	0.75 dm³ (0.026 ft³)

HF204 / HF206

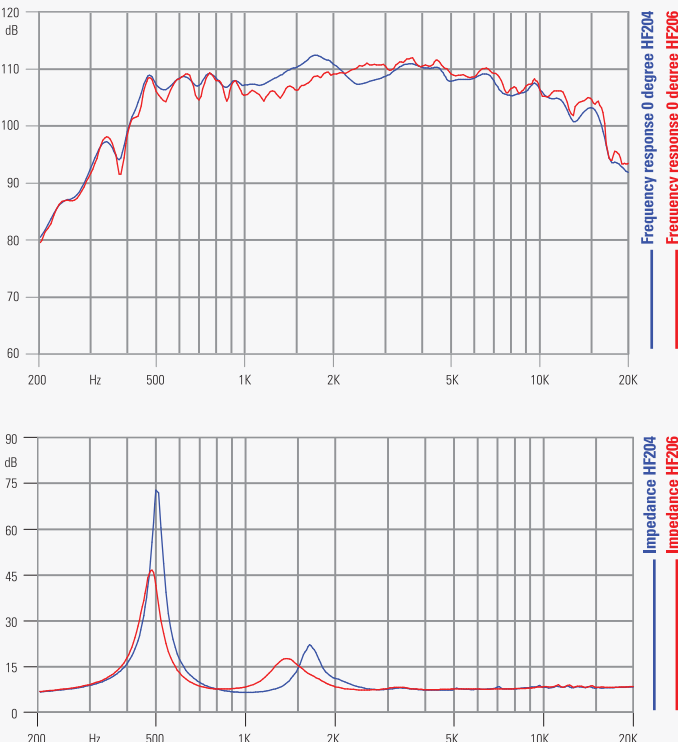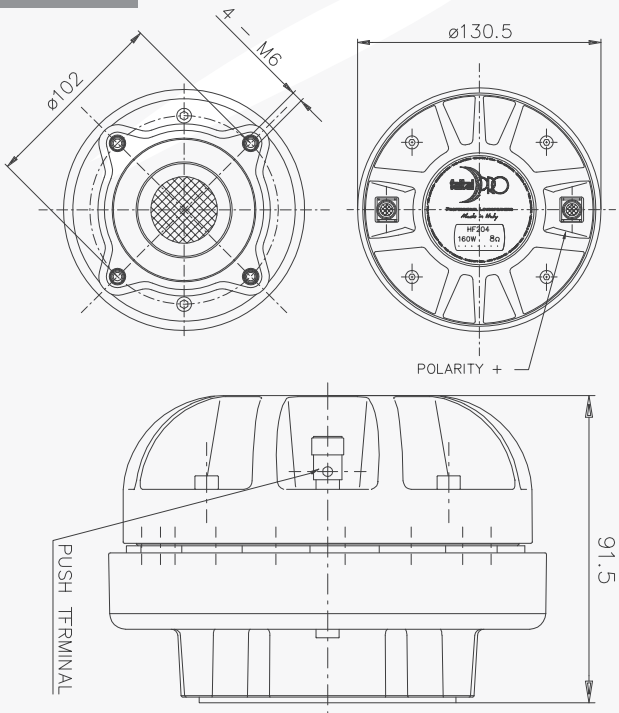

# HF1460

1.4" - 120 W - 109 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.8 mm (1.4 in)
Overall Diameter	120 mm (4.7 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	65 mm (2.6 in)
Net Weight	2.0 kg (4.5 lb)
Shipping Box	185 x 170 x 102 mm
(Single Carton Box)	(7.3 x 6.7 x 4.0 in)
Shipping Weight	2.1 kg (4.6 lb)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power Handling (1)	120 W
Maximum Power Handling (2)	240 W
Minimum Crossover Frequency (3)	1 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	0.6÷18 kHz
Voice Coil Diameter	86 mm (3.4 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Carbon Fiber
Diaphragm Shape	Dome
Winding Depth	3.4 mm (0.13 in)
Magnetic Gap Depth	4 mm (0.16 in)
Flux Density	2.2 T
Magnet	Neodymium Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	Cylindrical
NET Air Volume filled by HF Driver	0.65 dm³ (0.023 ft³)

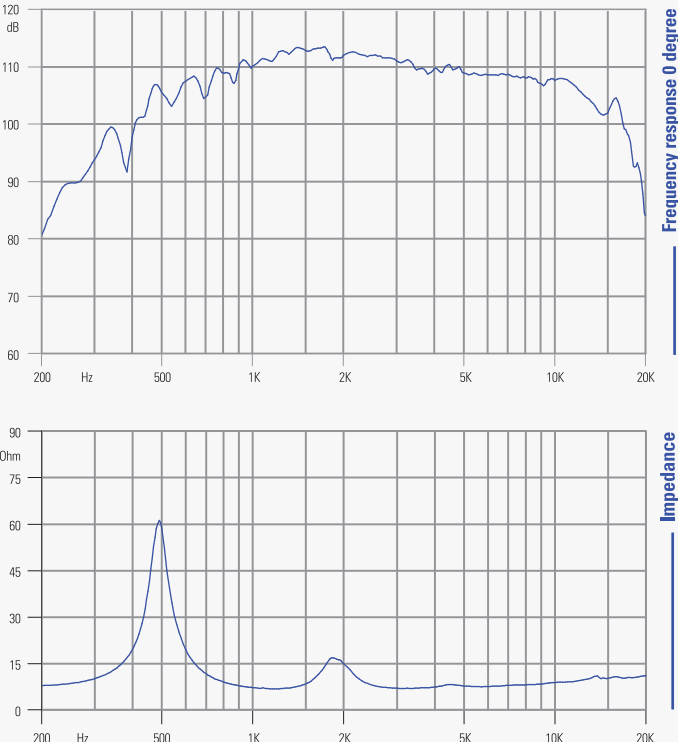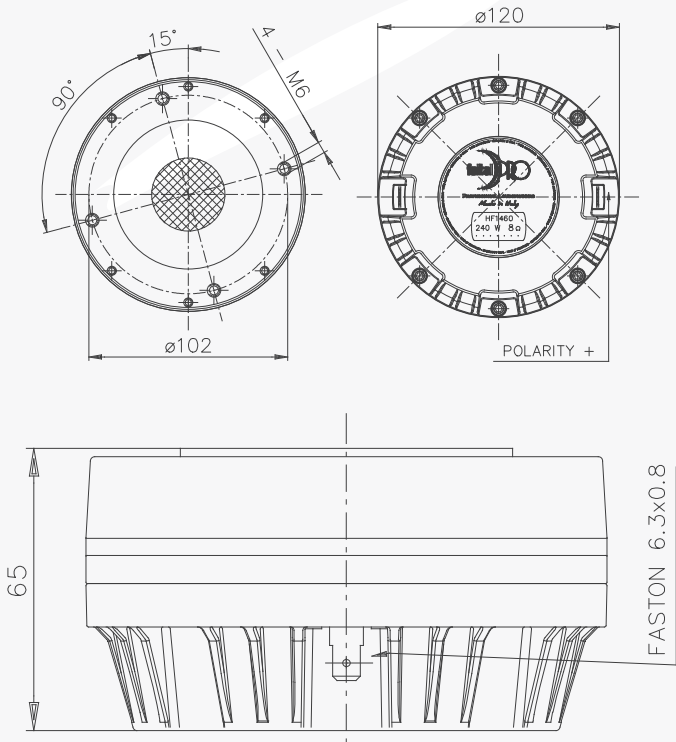

# HF1440

1.4" - 120 W - 109 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.8 mm (1.4 in)
Overall Diameter	124 mm (4.9 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	75 mm (3 in)
Net Weight	2.1 kg (4.5 lb)
Shipping Box	185 x 170 x 120 mm
(Single Carton Box)	(7.3 x 6.7 x 4.0 in)
Shipping Weight	2.4 kg (5.3 lb)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The driver's exit coincides with the end of the phase plug, there is no adaptation throat.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	8.3 Ω
AES Power Handling (1)	120 W
Maximum Power Handling (2)	240 W
Minimum Crossover Frequency (3)	0.7 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	0.5÷20 kHz
Voice Coil Diameter	86 mm (3.4 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	3.6 mm (0.14 in)
Magnetic Gap Depth	4 mm (0.16 in)
Flux Density	2.2 T
Magnet	Neodymium Ring
Re	6.8 Ω
Phase Plug Design	Radial
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	0.55 dm³ (0.019 ft³)

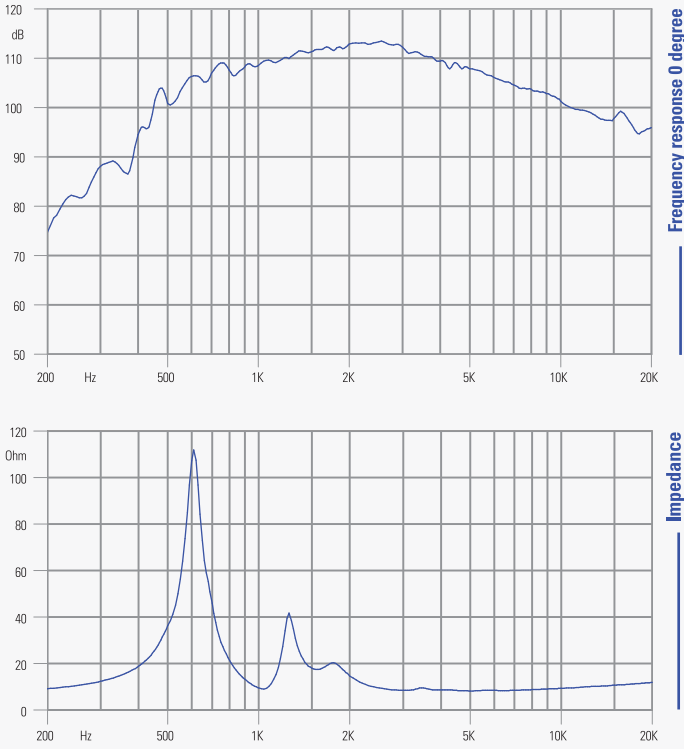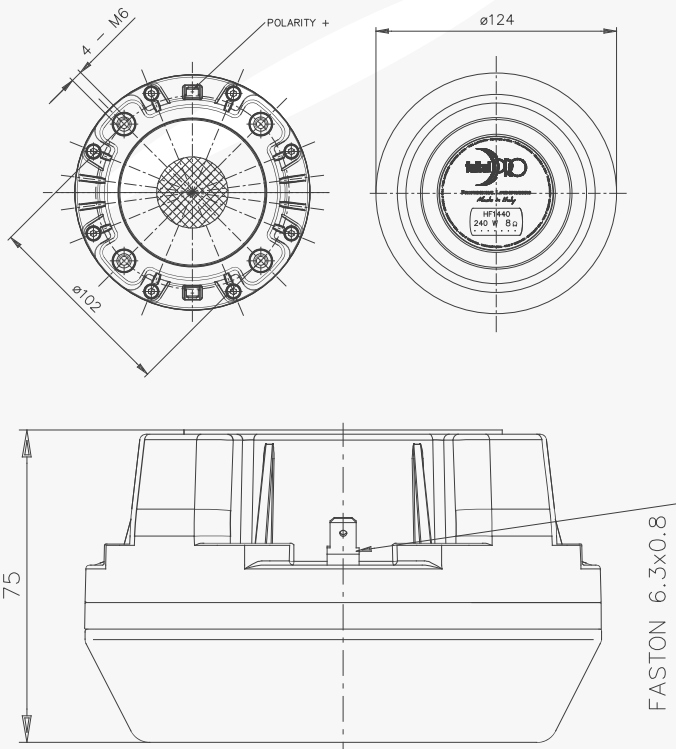



# HF1400

1.4" - 100 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.6 mm (1.4 in)
Overall Diameter	130.5 mm (5.14 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	55 mm (2.17 in)
Net Weight	2.5 kg (5.5 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	2.7 kg (6.0 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power above 0.9 kHz (1)	100 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	200 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	3.2 mm (0.13 in)
Flux Density	1.95 T
Magnet	Neodymium Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	12° Conical
NET Air Volume filled by HF Driver	0.45 dm³ (0.016 ft³)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

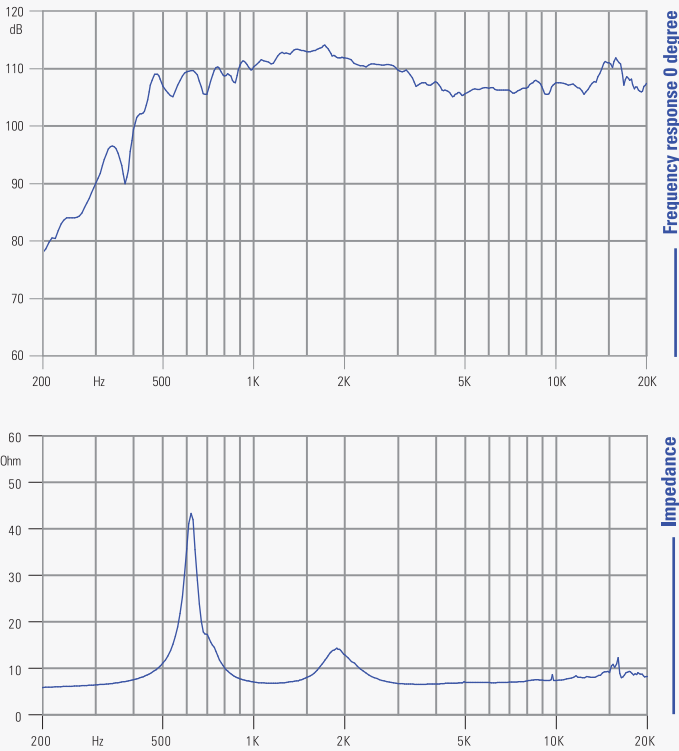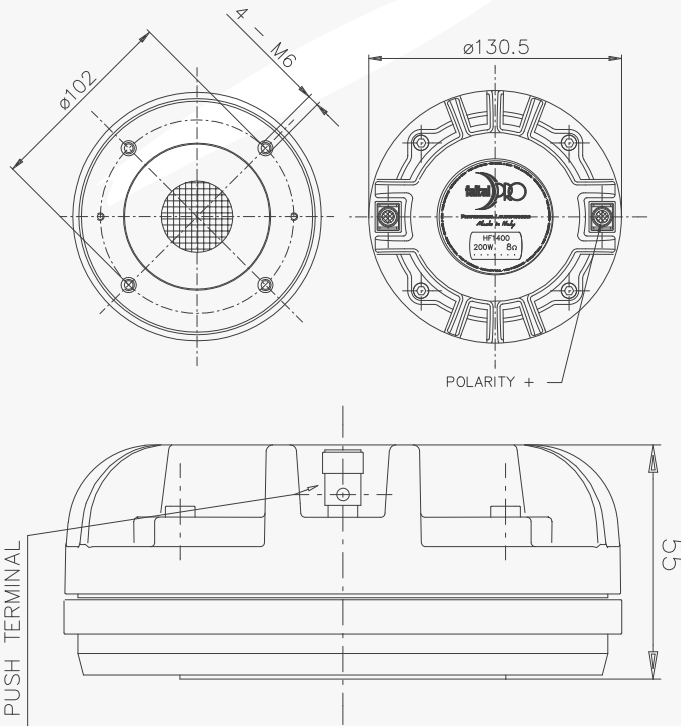

# HF141

1.4" - 100 W - 109 dB

### NOMINAL SPECIFICATIONS



Throat Diameter	35.6 mm (1.4 in)
Overall Diameter	170 mm (6.69 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	66 mm (2.60 in)
Net Weight	4.7 kg (10.4 lb)
Shipping Box	195 x 195 x 141 mm
(Single Carton Box)	(7.7 x 7.7 x 5.6 in)
Shipping Weight	4.9 kg (10.8 lb)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.



### TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7.2 Ω
AES Power above 0.9 kHz (1)	100 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	200 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	3.2 mm (0.13 in)
Flux Density	1.7 T
Magnet	Ferrite Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	6° Conical
NET Air Volume filled by HF Driver	1.05 dm³ (0.037 ft³)

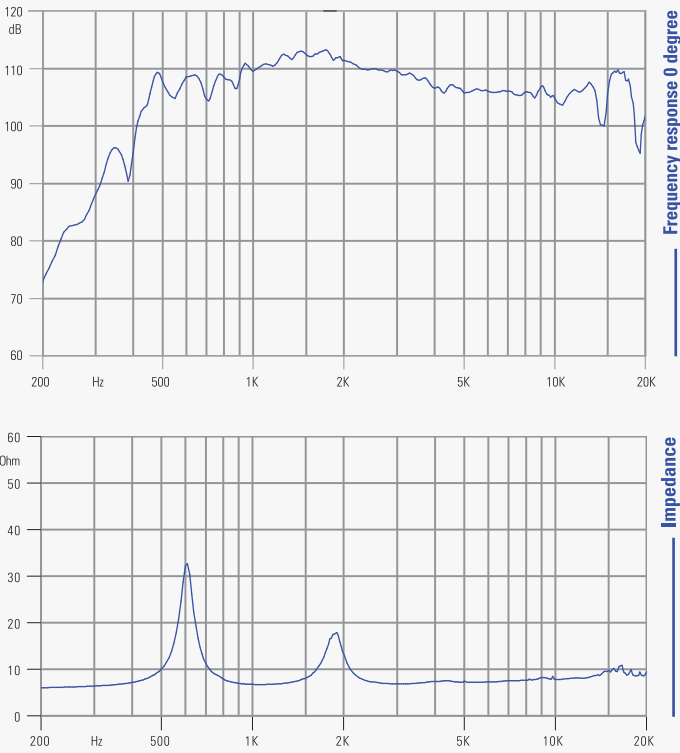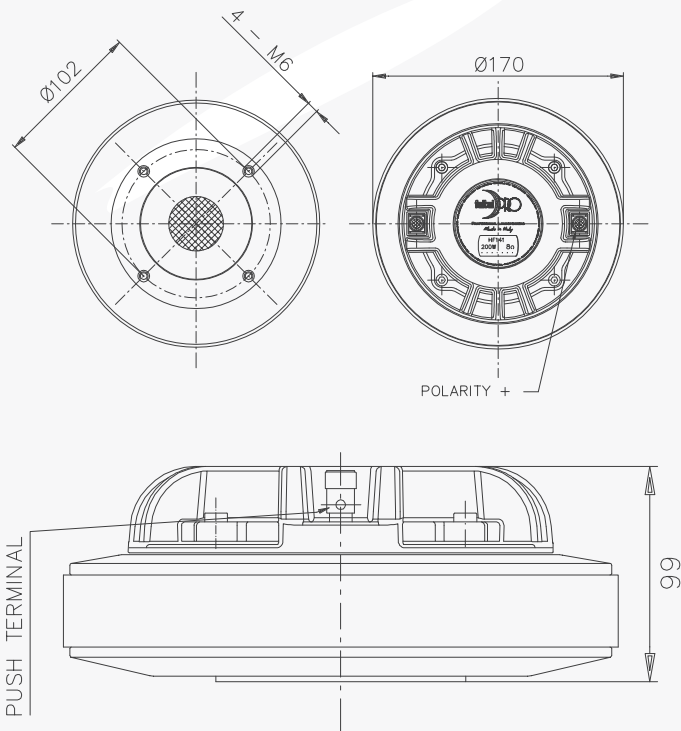

# HF148C

1.4" - 100 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.8 mm (1.4 in)
Overall Diameter	116 mm (4.6 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.0 in)
Depth	55 mm (2.2 in)
Net Weight	1.9 kg (4.1 lb)
Shipping Box	185 x 170 x 102 mm
(Single Carton Box)	(7.3 x 6.7 x 4.0 in)
Shipping Weight	2 kg (4.4 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7.2 Ω
AES Power above 0.9 kHz (1)	100 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	200 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	0.6÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	3.5 mm (0.14 in)
Magnetic Gap Depth	4.2 mm (0.17 in)
Flux Density	1.75 T
Magnet	Neodymium Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	15° Conical
NET Air Volume filled by HF Driver	0.47 dm³ (0.017 ft³)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

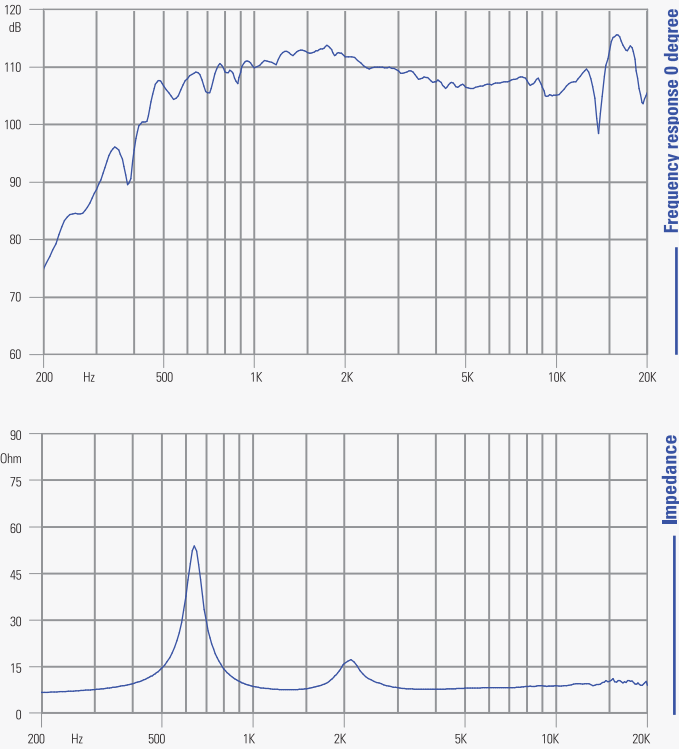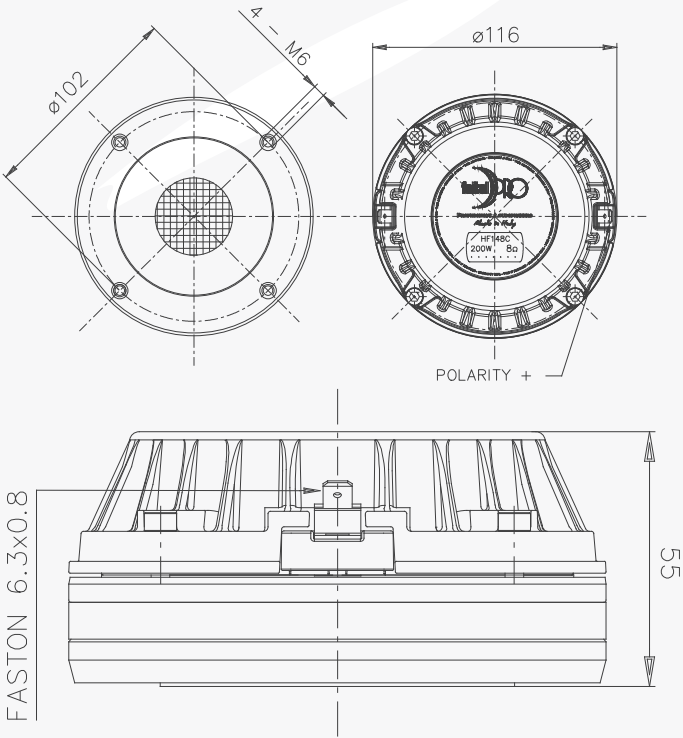



# HF143

1.4” - 100 W - 108 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35,6 mm (1.4 in)
Overall Diameter	156 mm (6.14 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	64.5 mm (2.54 in)
Net Weight	4.0 kg (8.8 lb)
Shipping Box	195 x 195 x 141 mm
(Single Carton Box)	(7.7 x 7.7 x 5.6 in)
Shipping Weight	4.2 kg (9.3 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.9 Ω
AES Power above 0.9 kHz (1)	100 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	200 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	108 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	3.2 mm (0.13 in)
Flux Density	1.6 T
Magnet	Ferrite Ring
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	6° Conical
NET Air Volume filled by HF Driver	0.73 dm³ (0.026 ft³)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

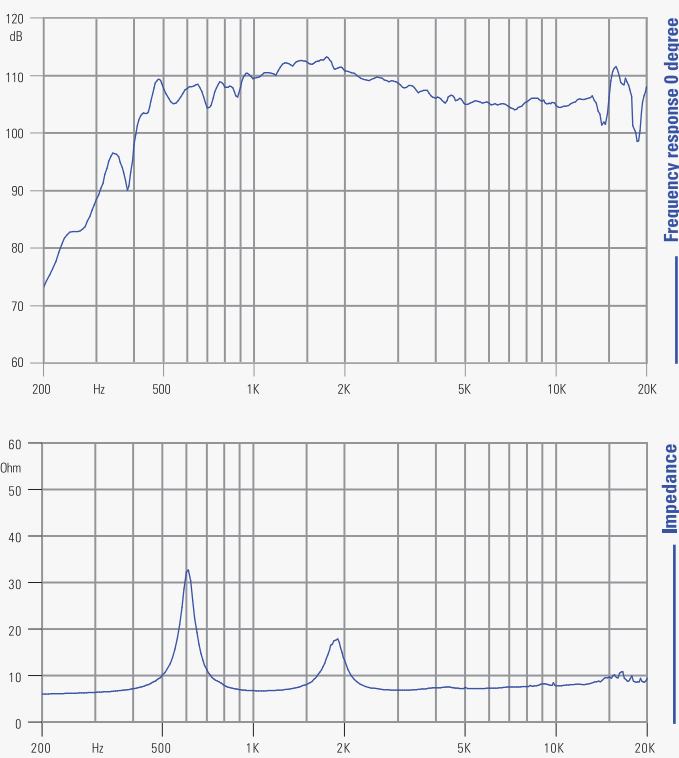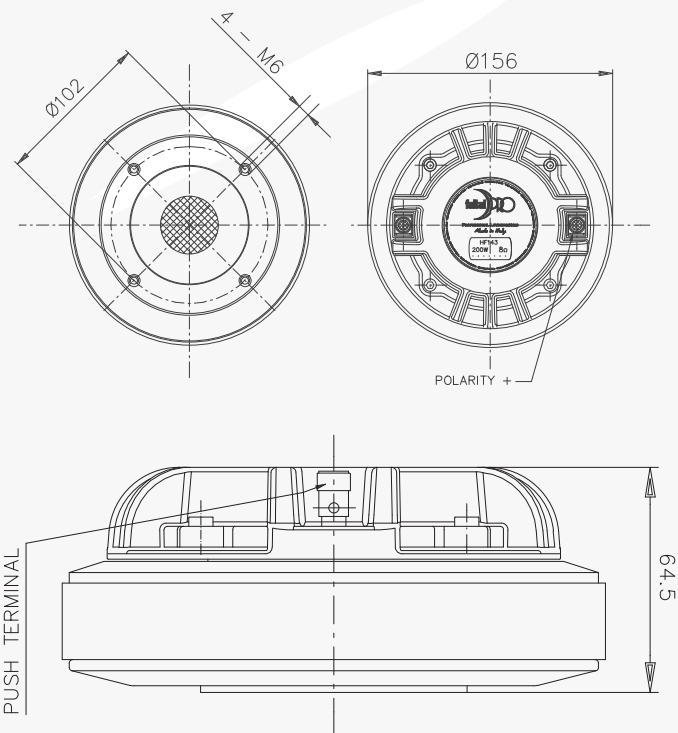

# HF140

1.4" - 70 W - 109 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.6 mm (1.4 in)
Overall Diameter	130.5 mm (5.14 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	62 mm (2.44 in)
Net Weight	2.9 kg (6.4 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	3.1 kg (6.8 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.3 Ω
AES Power above 0.9 kHz (1)	70 W
AES Power above 0.65 kHz (1)	50 W
Maximum Power above 0.9 kHz (2)	140 W
Maximum Power above 0.65 kHz (2)	100 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	0.5÷18 kHz
Voice Coil Diameter	74 mm (2.91 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Titanium
Diaphragm Shape	Dome
Winding Depth	2.35 mm (0.09 in)
Magnetic Gap Depth	2.8 mm (0.11 in)
Flux Density	1.8 T
Magnet	Neodymium Slug Crown
Re	5.6 Ω
Phase Plug Design	Annular
Exit Angle (5)	7° Conical
NET Air Volume filled by HF Driver	0.7 dm³ (0.025 ft³)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

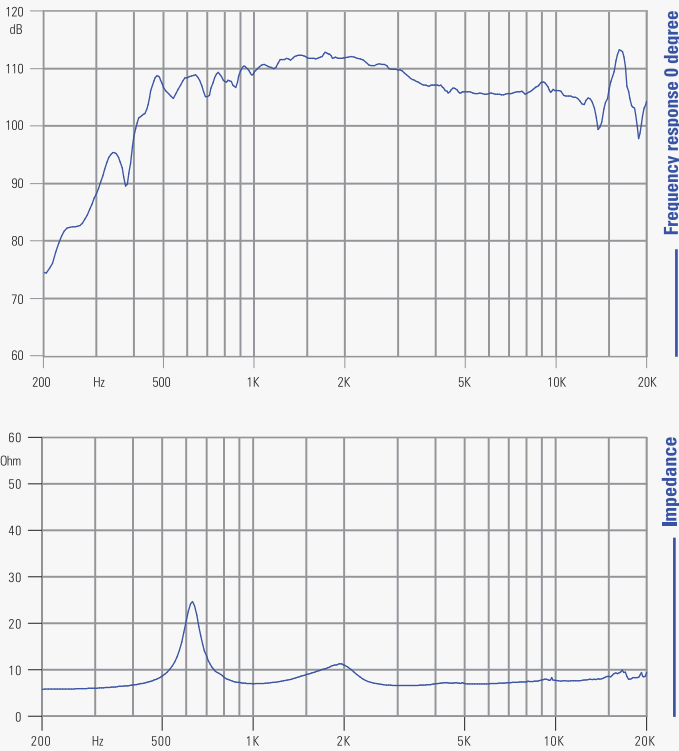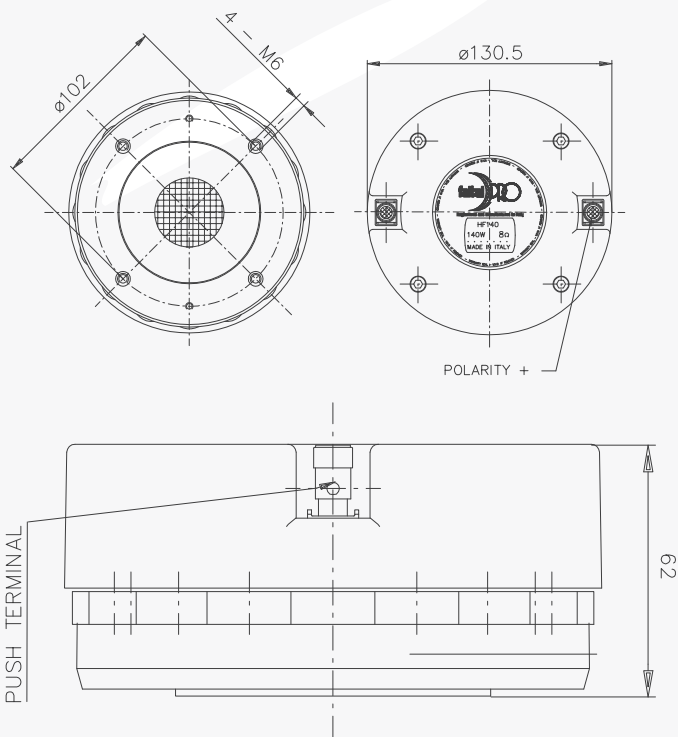

# HF142

1.4" - 80 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.6 mm (1.4 in)
Overall Diameter	115 mm (4.53 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	54.5 mm (2.15 in)
Net Weight	1.64 kg (3.6 lb)
Shipping Box	185 x 170 x 102 mm
(Single Carton Box)	(7.3 x 6.7 x 4.0 in)
Shipping Weight	1.95 kg (4.3 lb)

- NOTES:** Driver mounted on FaitalPRO LTH142 horn
- Perforated suspension for acoustic tuning
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	8.4 Ω
AES Power above 0.9 kHz (1)	80 W
AES Power above 0.65 kHz (1)	25 W
Maximum Power above 0.9 kHz (2)	160 W
Maximum Power above 0.65 kHz (2)	50 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	0.7÷18 kHz
Voice Coil Diameter	65 mm (2.56 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	4.2 mm (0.17 in)
Flux Density	1.8 T
Magnet	Neodymium Ring
Re	6.7 Ω
Phase Plug Design	Annular
Exit Angle (5)	29° Conical
NET Air Volume filled by HF Driver	0.4 dm³ (0.014 ft³)

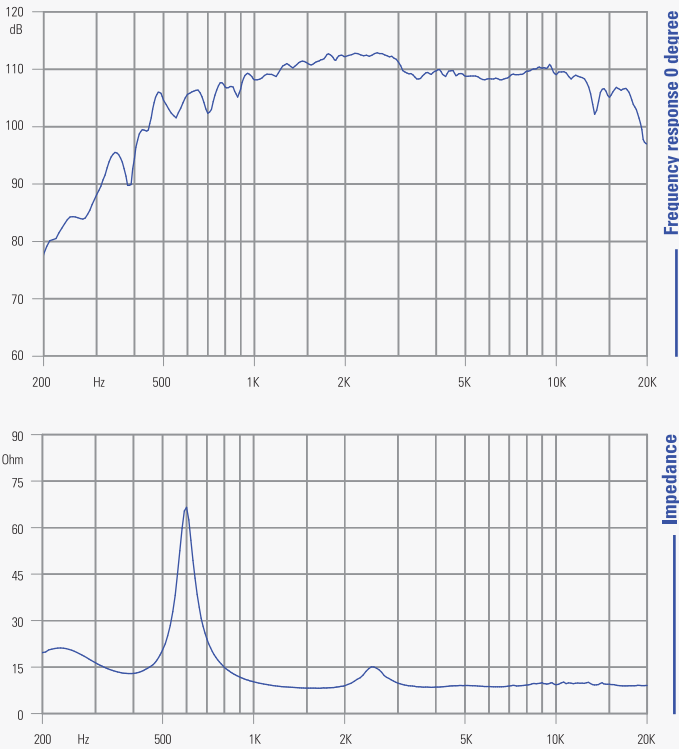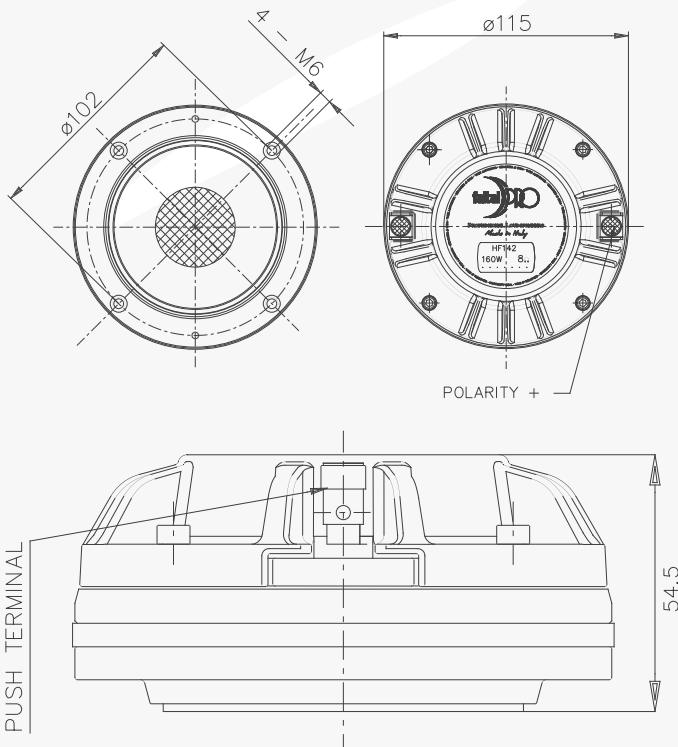



HF146

1.4" - 80 W - 109 dB

HF146R <sup>(6)</sup>

1.4" - 80 W - 109 dB



NOMINAL SPECIFICATIONS

	HF146	HF146R <sup>(6)</sup>
Throat Diameter	35.6 mm (1.4 in)	35.6 mm (1.4 in)
Overall Diameter	123 mm (4.84 in)	123 mm (4.84 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)	102 mm (4.02 in)
Depth	63.5 mm (2.5 in)	63.5 mm (2.5 in)
Net Weight	2 kg (4.4 lb)	2 kg (4.4 lb)
Shipping Box	185 x 170 x 122 mm	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	2.3 kg (5.1 lb)	2.3 kg (5.1 lb)

TECHNICAL PARAMETERS

	HF146	HF146R <sup>(6)</sup>
Nominal Impedance	8 Ω	8 Ω
Minimum Impedance	6.8 Ω	7.1 Ω
AES Power above 0.9 kHz <sup>(1)</sup>	80 W	80 W
AES Power above 0.65 kHz <sup>(1)</sup>	40 W	40 W
Maximum Power above 0.9 kHz <sup>(2)</sup>	160 W	160 W
Maximum Power above 0.65 kHz <sup>(2)</sup>	80 W	80 W
Minimum Crossover Frequency <sup>(3)</sup>	0.9 kHz	0.9 kHz
Sensitivity <sup>(1W/1m)</sup> <sup>(4)</sup>	109 dB	109 dB
Frequency Range	0.7÷18 kHz	0.7÷18 kHz
Voice Coil Diameter	65 mm (2.56 in)	65 mm (2.56 in)
Winding Material	Al	Al
Former Material	Kapton	Kapton
Diaphragm Material	Ketone Polymer	Ketone Polymer
Diaphragm Shape	Dome	Dome
Winding Depth	3 mm (0.12 in)	3.75 mm (0.15 in)
Magnetic Gap Depth	4.2 mm (0.17 in)	4.2 mm (0.17 in)
Flux Density	1.7 T	1.7 T
Magnet	Neodymium Slug Crown	Neodymium Slug Crown
Re	5.5 Ω	5.5 Ω
Phase Plug Design	Annular	Annular
Exit Angle <sup>(5)</sup>	29° Conical	29° Conical
NET Air Volume filled by HF Driver	0.55 dm³ (0.019 ft³)	0.55 dm³ (0.026 ft³)

NOTES: Driver mounted on FaitalPRO LTH142 horn

(1) 2 Hours Test According to AES 2-1984 Rev. 2003

(2) Maximum power is defined as 3 dB greater than nominal power.



(3) 12 dB/oct or higher slope high-pass filter.

(4) Averaged within the frequency range.

(5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

(6) Perforated suspension for acoustic tuning.

HF146 / HF146R

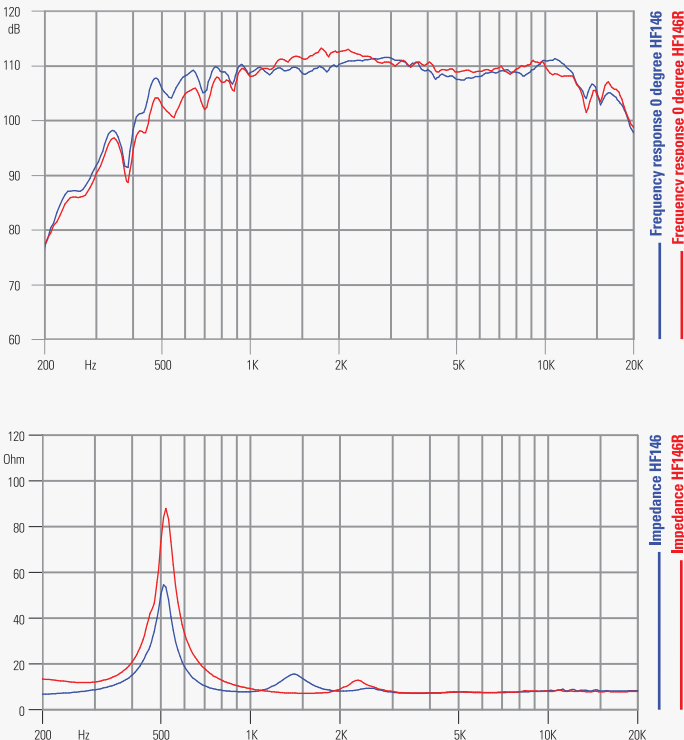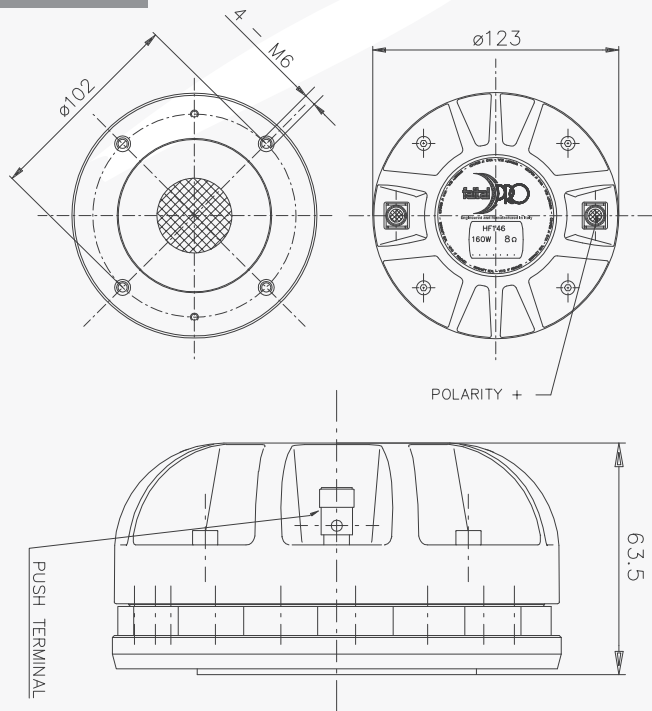

# HF144

1.4" - 80 W - 109 dB





NOMINAL SPECIFICATIONS

Throat Diameter	35.6 mm (1.4 in)
Overall Diameter	123 mm (4.84 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	63.5 mm (2.5 in)
Net Weight	2 kg (4.4 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	2.3 kg (5.1 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.8 Ω
AES Power above 0.9 kHz (1)	80 W
AES Power above 0.65 kHz (1)	40 W
Maximum Power above 0.9 kHz (2)	160 W
Maximum Power above 0.65 kHz (2)	80 W
Minimum Crossover Frequency (3)	0.9 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	0.7÷18 kHz
Voice Coil Diameter	65 mm (2.56 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	3 mm (0.12 in)
Magnetic Gap Depth	4.2 mm (0.17 in)
Flux Density	1.7 T
Magnet	Neodymium Slug Crown
Re	5.5 Ω
Phase Plug Design	Annular
Exit Angle (5)	29° Conical
NET Air Volume filled by HF Driver	0.55 dm³ (0.019 ft³)

- NOTES: Driver mounted on FaitalPRO LTH142 horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

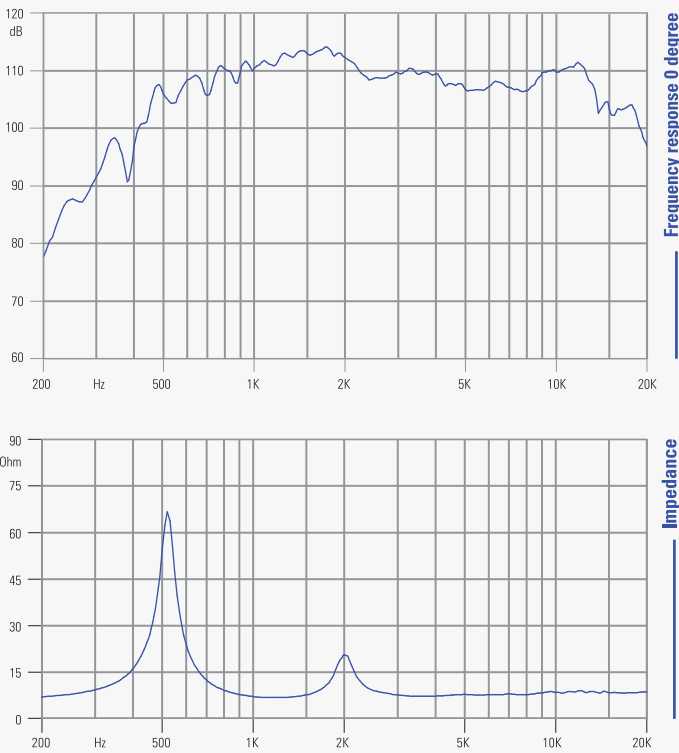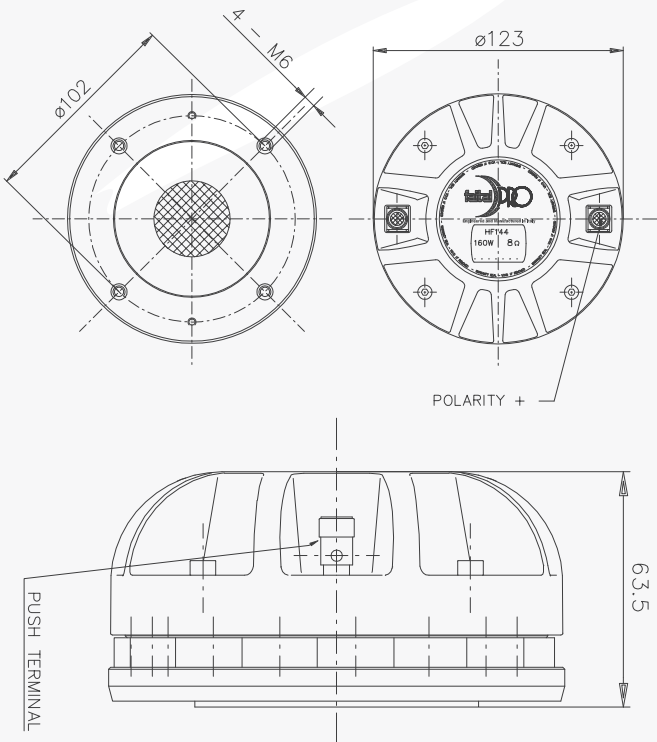

# HF1000

1" - 70 W - 110 dB

# HF1000T

1" - 70 W - 108 dB





### NOMINAL SPECIFICATIONS

	HF1000	HF1000T
Throat Diameter	25.4 mm (1 in)	25.4 mm (1 in)
Overall Diameter	90 mm (3.54 in)	90 mm (3.54 in)
90° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)	76 mm (2.99 in)
Depth	48.5 mm (1.91 in)	49.5 mm (1.95 in)
Net Weight	985 g (2.2 lb)	985 g (2.2 lb)
Shipping Box	147 x 130 x 82 mm	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	1.1 kg (2.4 lb)	1.1 kg (2.4 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

### TECHNICAL PARAMETERS

	HF1000	HF1000T
Nominal Impedance	8 Ω	8 Ω
Minimum Impedance	6.8 Ω	7 Ω
AES Power Handling (1)	70 W	70 W
Maximum Power Handling (2)	140 W	140 W
Minimum Crossover Frequency (3)	1.3 kHz	1.2 kHz
Sensitivity (1W/1m) (4)	110 dB	108 dB
Frequency Range	1÷18 kHz	1÷18 kHz
Voice Coil Diameter	52 mm (2 in)	52 mm (2 in)
Winding Material	Al	Al
Former Material	Kapton	Kapton
Diaphragm Material	Ketone Polymer	Titanium
Diaphragm Shape	Dome	Dome
Winding Depth	2.6 mm (0.10 in)	2.6 mm (0.10 in)
Magnetic Gap Depth	3.1 mm (0.12 in)	3.1 mm (0.12 in)
Flux Density	2.1 T	2.1 T
Magnet	Neodymium Ring	Neodymium Ring
Re	5.5 Ω	5.5 Ω
Phase Plug Design	Annular	Annular
Exit Angle (5)	0° Cylindrical	0° Cylindrical
NET Air Volume filled by HF Driver	0.245 dm³ (0.009 ft³)	0.245 dm³ (0.009 ft³)

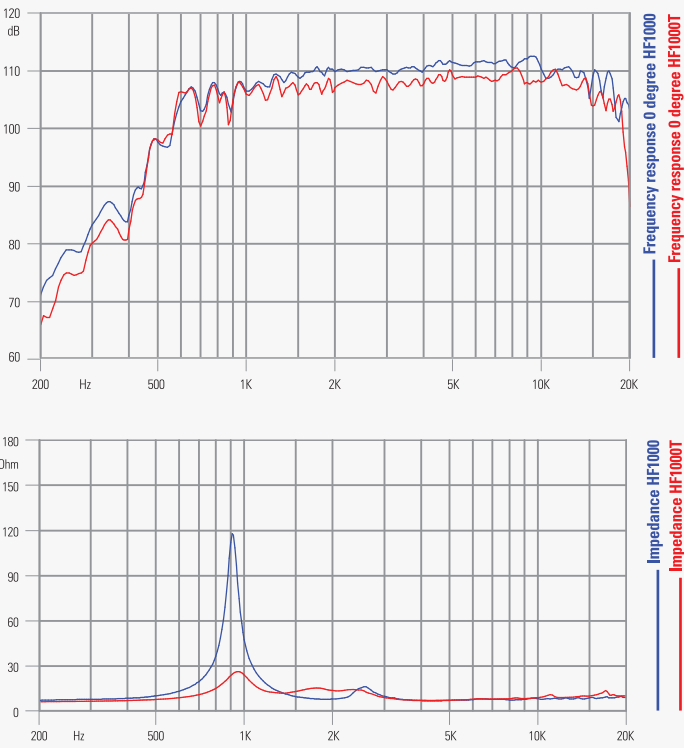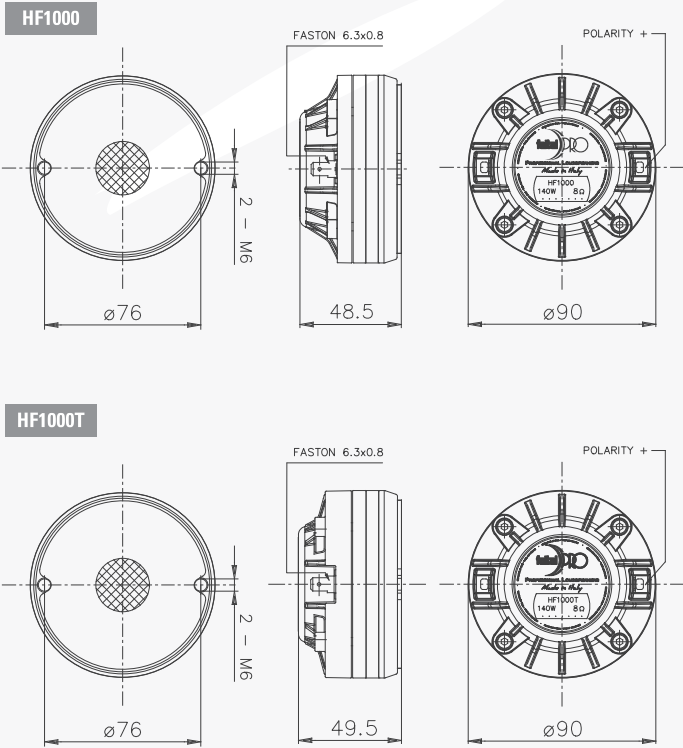



# HF1006

1" - 60 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	87 mm (3.43 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Depth	39 mm (1.54 in)
Net Weight	775 g (1.7 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	890 g (2.0 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.5 Ω
AES Power Handling (1)	60 W
Maximum Power Handling (2)	120 W
Minimum Crossover Frequency (3)	1 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	1÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	1.7 mm (0.07 in)
Magnetic Gap Depth	3.5 mm (0.14 in)
Flux Density	2.1 T
Magnet	Neodymium Ring
Re	5.4 Ω
Phase Plug Design	Annular
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	0.2 dm³ (0.007 ft³)

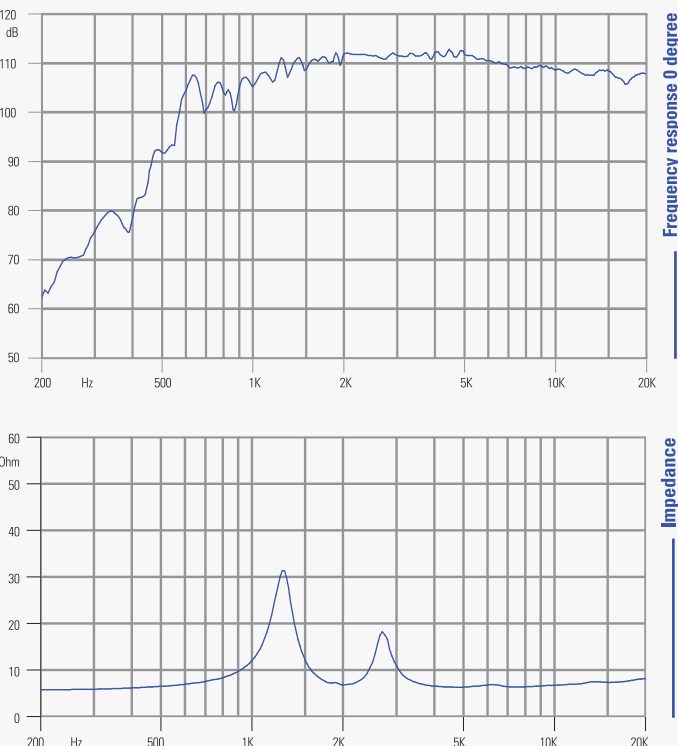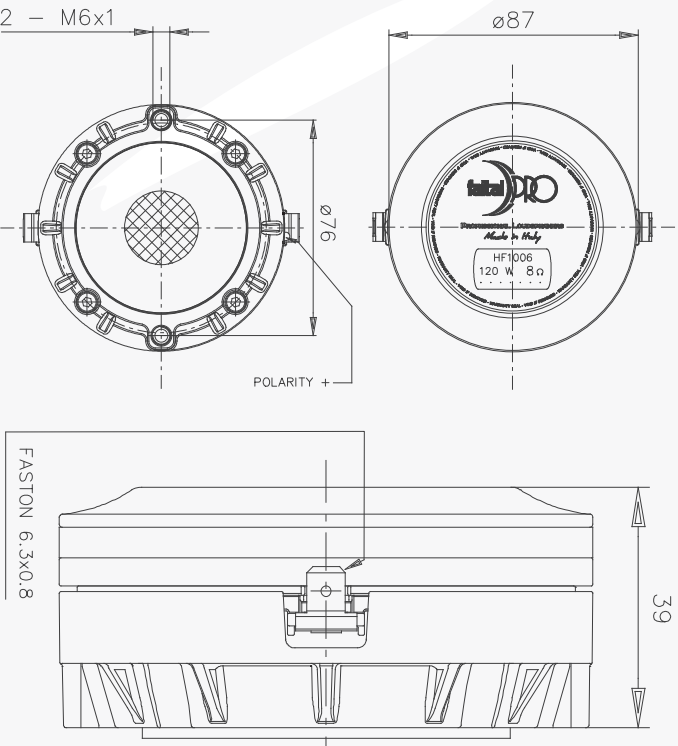

# HF10AK

1" - 60 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	102 mm (4.02 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
120° Mounting Holes Diameter (3xM6)	57 mm (2.24 in)
Depth	54 mm (2.13 in)
Net Weight	1.4 kg (3.1 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	1.5 kg (3.3 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
AES Power Handling (1)	60 W
Maximum Power Handling (2)	120 W
Minimum Crossover Frequency (3)	1.3 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	0.8÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	1.9 mm (0.07 in)
Magnetic Gap Depth	2.65 mm (0.10 in)
Flux Density	1.9 T
Magnet	Neodymium Ring
Re	5.8 Ω
Phase Plug Design	Annular
Exit Angle (5)	21° Conical
NET Air Volume filled by HF Driver	0.35 dm³ (0.012 ft³)

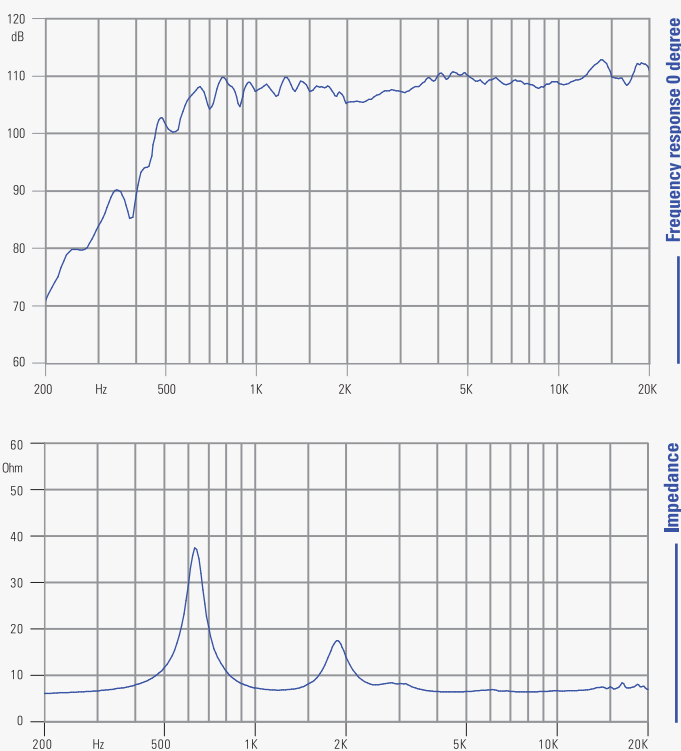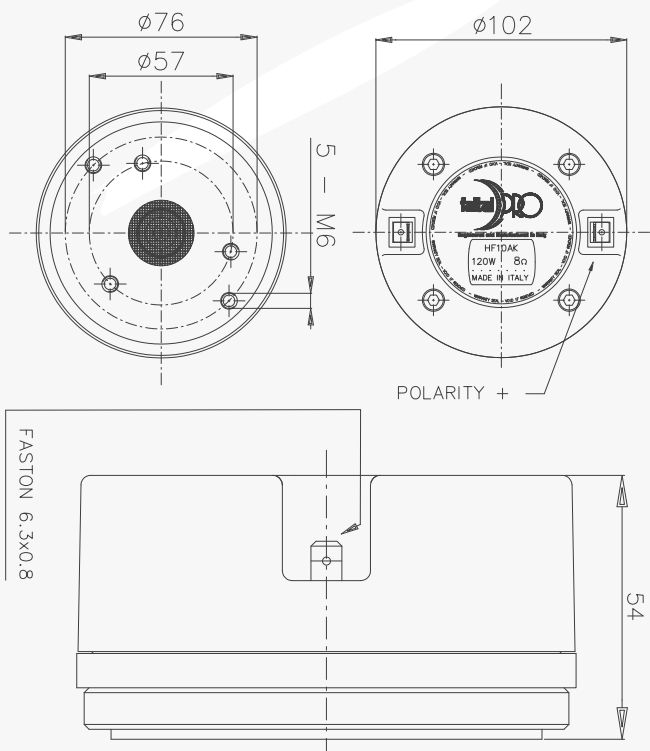

# HF106

1" - 60 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	95.7 mm (3.77 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Depth	58.8 mm (2.31 in)
Net Weight	1.1 kg (2.3 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	1.4 kg (3.1 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The driver's exit coincides with the end of the phase plug, there is no adaptation throat.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power Handling (1)	60 W
Maximum Power Handling (2)	120 W
Minimum Crossover Frequency (3)	1.3 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	1.3÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.3 mm (0.09 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	2.1 T
Magnet	Neodymium Ring
Re	5.4 Ω
Phase Plug Design	Annular
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	0.25 dm³ (0.009 ft³)

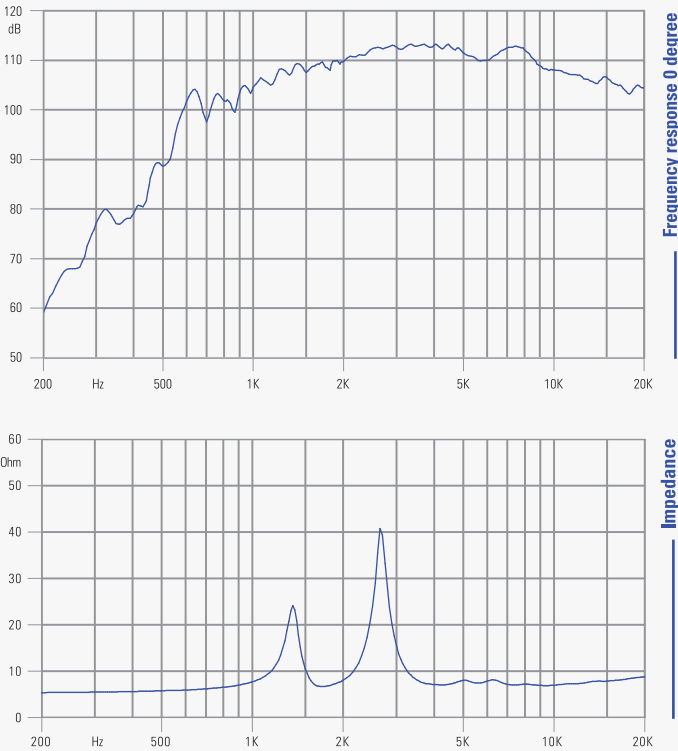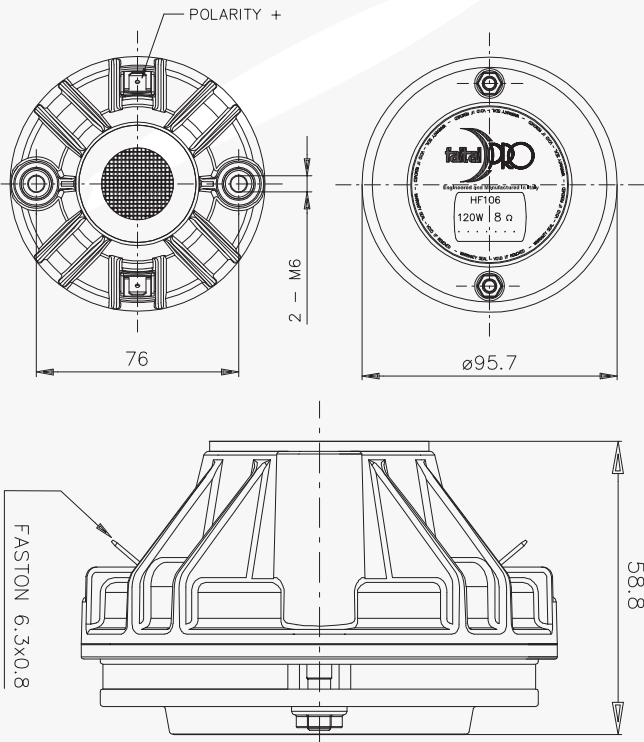



# HF107

1" - 70 W - 109 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	121 mm (4.76 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Depth	75.4 mm (2.97 in)
Net Weight	2.5 kg (5.5 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	2.7 kg (5.8 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.8 Ω
AES Power Handling (1)	70 W
Maximum Power Handling (2)	140 W
Minimum Crossover Frequency (3)	1.3 kHz
Sensitivity (1W/1m) (4)	109 dB
Frequency Range	1.3÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.3 mm (0.09 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.9 T
Magnet	Ferrite Ring
Re	5.4 Ω
Phase Plug Design	Annular
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	0.5 dm³ (0.018 ft³)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The driver's exit coincides with the end of the phase plug, there is no adaptation throat.

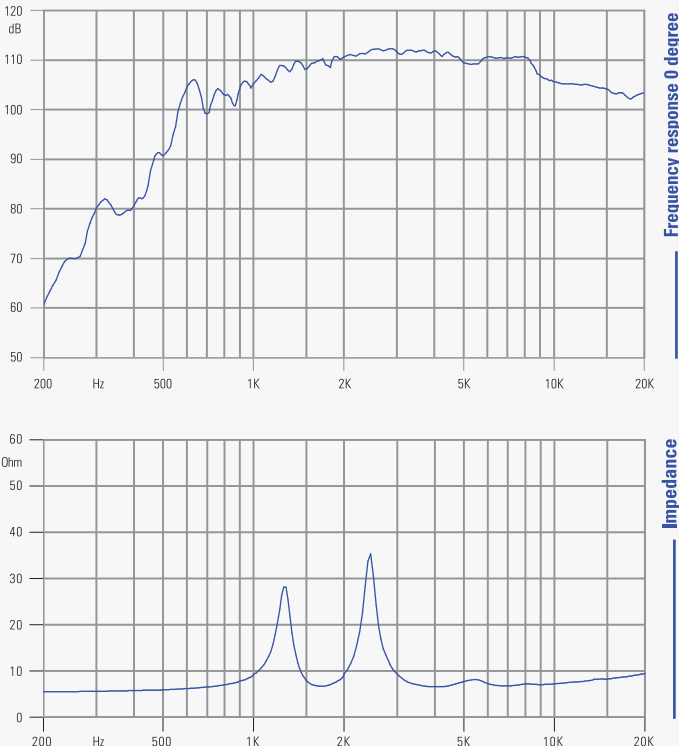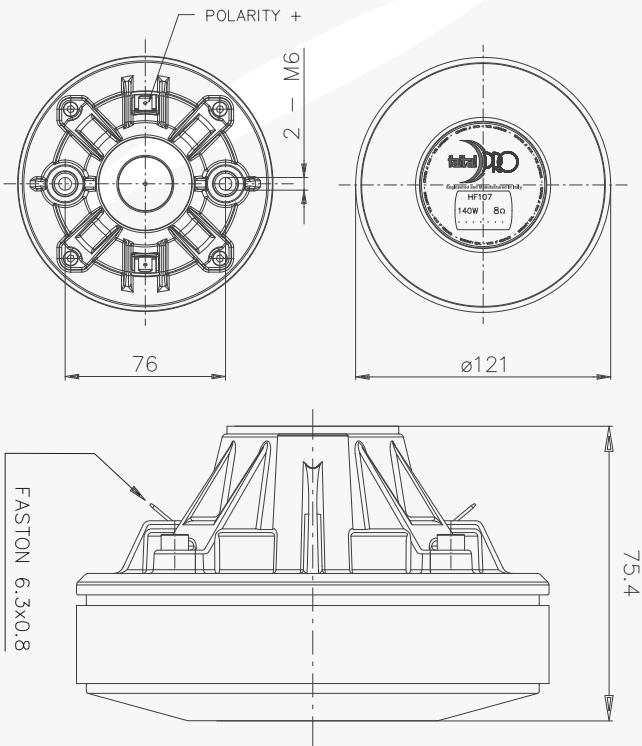

HF108

1" - 60 W - 109 dB

HF108R<sup>(6)</sup>

1" - 60 W - 109 dB



NOMINAL SPECIFICATIONS

	HF108	HF108R <sup>(6)</sup>
Throat Diameter	25.4 mm (1 in)	25.4 mm (1 in)
Overall Diameter	87 mm (3.43 in)	87 mm (3.43 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)	76 mm (2.99 in)
Depth	41 mm (1.61 in)	41 mm (1.61 in)
Net Weight	800 g (1.8 lb)	800 g (1.8 lb)
Shipping Box	147 x 130 x 82 mm	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	1.2 kg (2.6 lb)	1.2 kg (2.6 lb)

NOTES: Driver mounted on a 1" 50° x 40° Al horn

(1) 2 Hours Test According to AES 2-1984 Rev. 2003

(2) Maximum power is defined as 3 dB greater than nominal power.

(3) 12 dB/oct or higher slope high-pass filter.

(4) Averaged within the frequency range.



(5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

(6) Perforated suspension for acoustic tuning and tighter clamping.

TECHNICAL PARAMETERS

	HF108	HF108R <sup>(6)</sup>
Nominal Impedance	8 Ω	8 Ω
Minimum Impedance	6.8 Ω	6.5 Ω
AES Power Handling (1)	60 W	60 W
Maximum Power Handling (2)	120 W	120 W
Minimum Crossover Frequency (3)	1.3 kHz	1.3 kHz
Sensitivity (1W/1m) (4)	109 dB	109 dB
Frequency Range	1÷20 kHz	1÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)	44 mm (1.73 in)
Winding Material	Al	Al
Former Material	Kapton	Kapton
Diaphragm Material	Ketone Polymer	Ketone Polymer
Diaphragm Shape	Dome	Dome
Winding Depth	2.3 mm (0.09 in)	2.3 mm (0.09 in)
Magnetic Gap Depth	2.85 mm (0.11 in)	2.85 mm (0.11 in)
Flux Density	2.1 T	2.1 T
Magnet	Neodymium Ring	Neodymium Ring
Re	5.8 Ω	5.8 Ω
Phase Plug Design	Annular	Annular
Exit Angle (5)	31° Conical	31° Conical
NET Air Volume filled by HF Driver	0.195 dm³ (0.007 ft³)	0.195 dm³ (0.007 ft³)

HF108 / HF108R

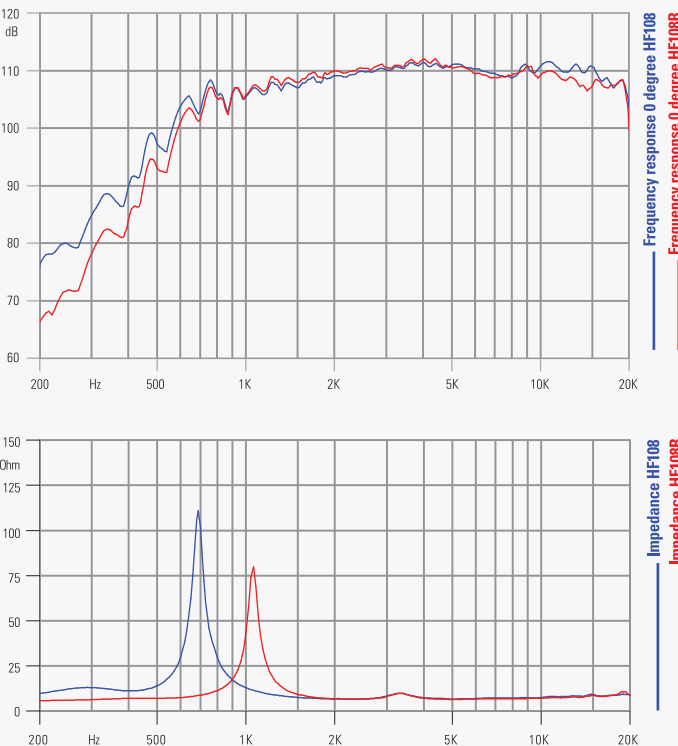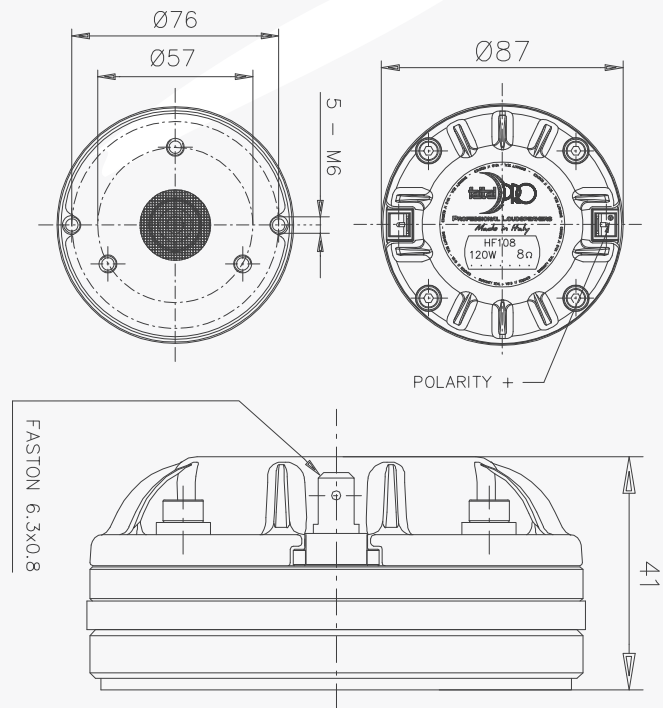

# HF109

1" - 60 W - 108 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	121 mm (4.76 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Depth	55 mm (2.17 in)
Net Weight	2.2 kg (4.9 lb)
Shipping Box	185 x 170 x 102 mm
(Single Carton Box)	(7.3 x 6.7 x 4.0 in)
Shipping Weight	2.5 kg (5.5 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.8 Ω
AES Power Handling (1)	60 W
Maximum Power Handling (2)	120 W
Minimum Crossover Frequency (3)	1.3 kHz
Sensitivity (1W/1m) (4)	108 dB
Frequency Range	1÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	2.3 mm (0.09 in)
Magnetic Gap Depth	2.85 mm (0.11 in)
Flux Density	1.8 T
Magnet	Ferrite Ring
Re	5.8 Ω
Phase Plug Design	Annular
Exit Angle (5)	13° Conical
NET Air Volume filled by HF Driver	0.43 dm³ (0.015 ft³)

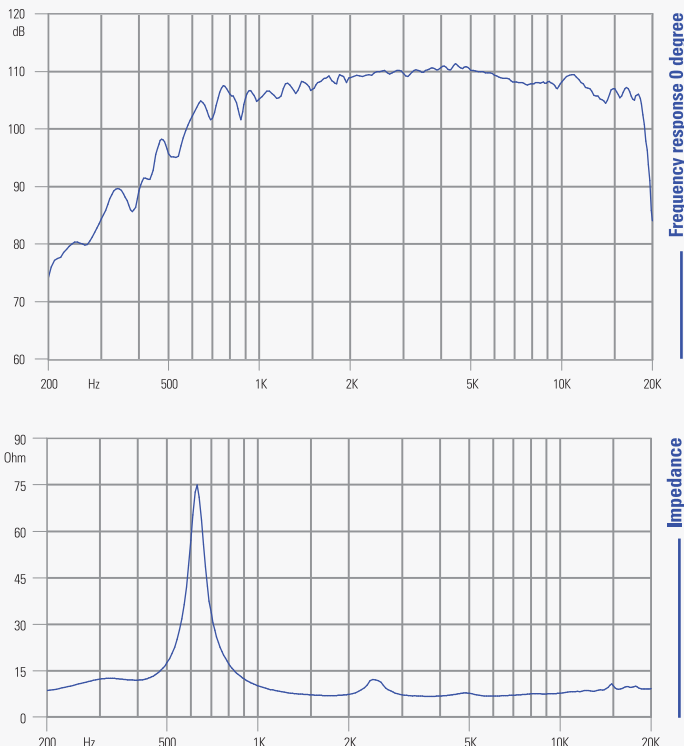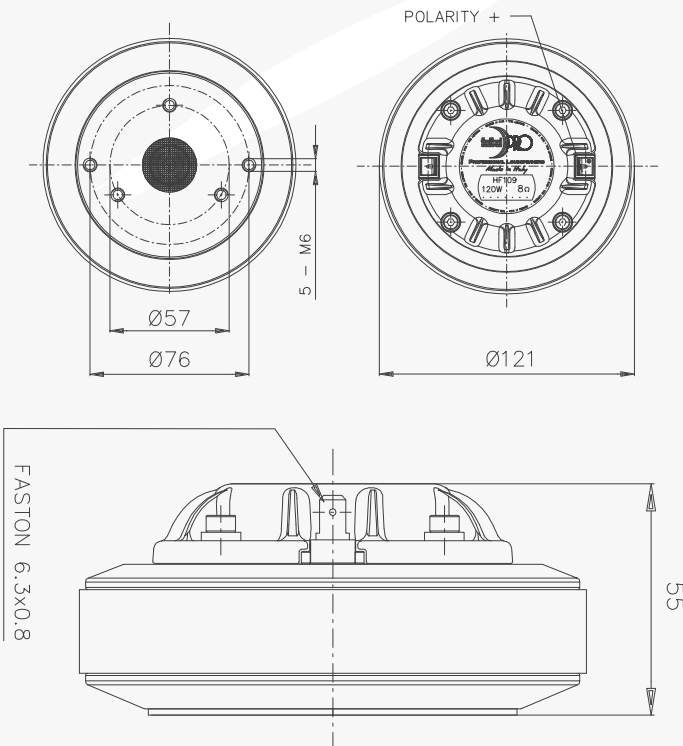

# HF103

1" - 60 W - 107 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	100 mm (3.94 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Depth	55 mm (2.17 in)
Net Weight	1.3 kg (2.9 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	2.5 kg (5.5 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.8 Ω
AES Power Handling (1)	60 W
Maximum Power Handling (2)	120 W
Minimum Crossover Frequency (3)	1.3 kHz
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	1÷20 kHz
Voice Coil Diameter	44 mm (1.73 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	2.3 mm (0.09 in)
Magnetic Gap Depth	2.85 mm (0.11 in)
Flux Density	1.5 T
Magnet	Ferrite Ring
Re	5.8 Ω
Phase Plug Design	Annular
Exit Angle (5)	13° Conical
NET Air Volume filled by HF Driver	0.33 dm³ (0.011 ft³)

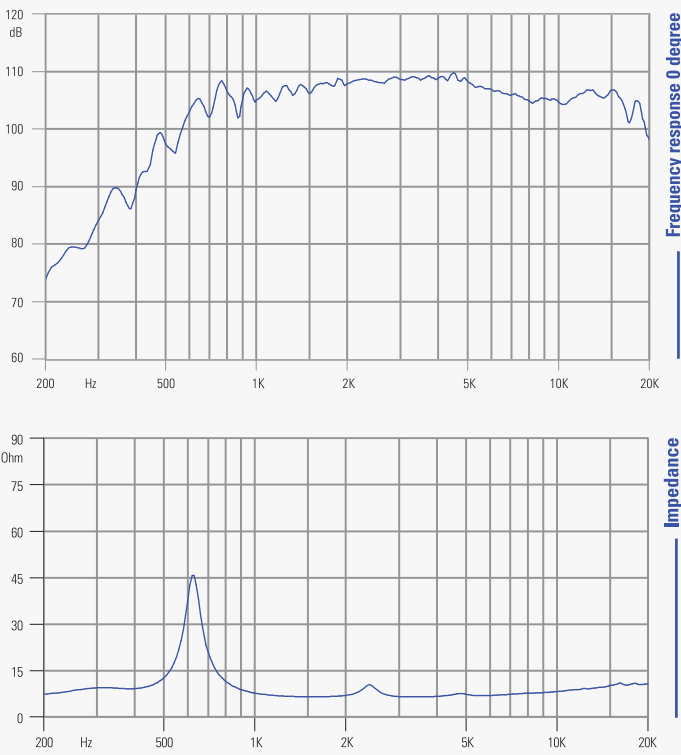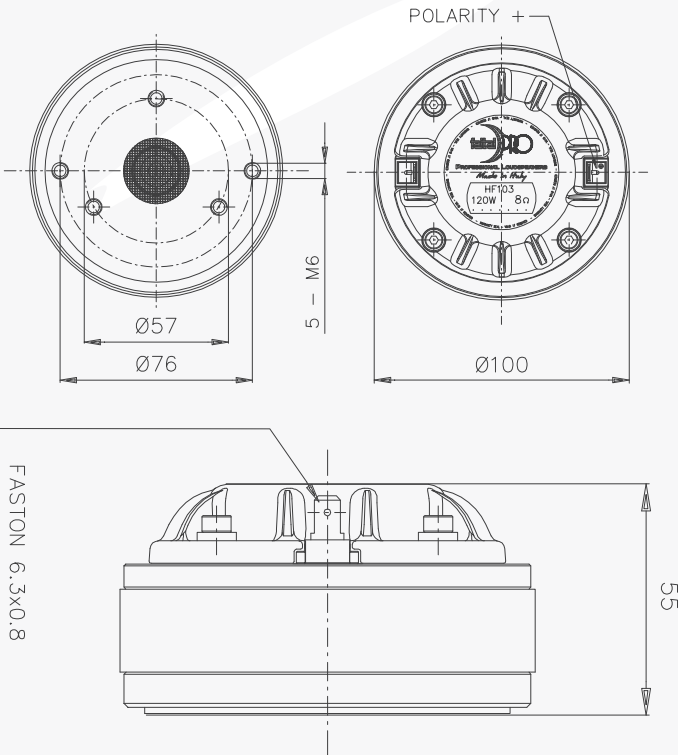



# HF110

1" - 40 W - 110 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	72 mm (2.83 in)
180° Mounting Holes Diameter (2xM5)	57 mm (2.24 in)
Depth	35 mm (1.38 in)
Net Weight	520 g (1.1 lb)
Shipping Box	98 x 90 x 64 mm
(Single Carton Box)	(3.9 x 3.5 x 2.5 in)
Shipping Weight	570 g (1.3 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power Handling (1)	40 W
Maximum Power Handling (2)	80 W
Minimum Crossover Frequency (3)	2 kHz
Sensitivity (1W/1m) (4)	110 dB
Frequency Range	2÷20 kHz
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	2.3 mm (0.09 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	2.1 T
Magnet	Neodymium Ring
Re	5.5 Ω
Phase Plug Design	Annular
Exit Angle (5)	34° Conical
NET Air Volume filled by HF Driver	0.115 dm³ (0.004 ft³)

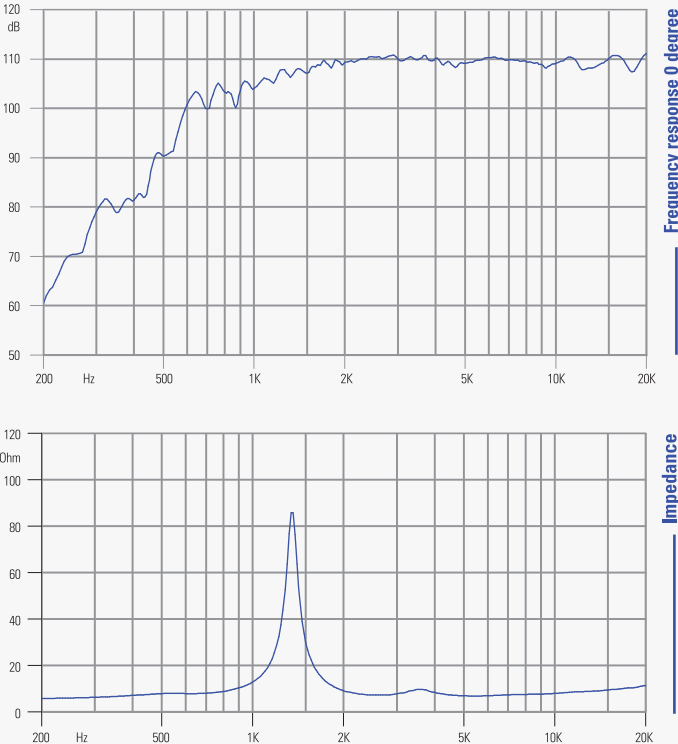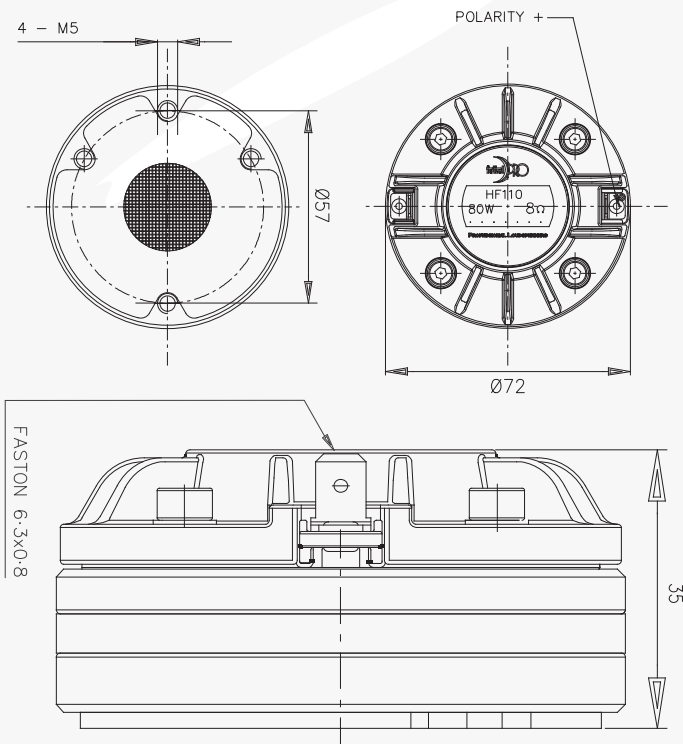

# HF104

1" - 40 W - 108 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	91 mm (3.58 in)
180° Mounting Holes Diameter (2xM5)	76 mm (2.99 in)
Depth	51 mm (2.01 in)
Net Weight	670 g (1.5 lb)
Shipping Box	98 x 90 x 64 mm
(Single Carton Box)	(3.9 x 3.5 x 2.5 in)
Shipping Weight	700 g (1.5 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) The driver's exit coincides with the end of the phase plug, there is no adaptation throat.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.9 Ω
AES Power Handling (1)	40 W
Maximum Power Handling (2)	80 W
Minimum Crossover Frequency (3)	1.7 kHz
Sensitivity (1W/1m) (4)	108 dB
Frequency Range	1.5÷20 kHz
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.85 T
Magnet	Neodymium Ring
Re	5.5 Ω
Phase Plug Design	Radial
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	0.16 dm³ (0.006 ft³)

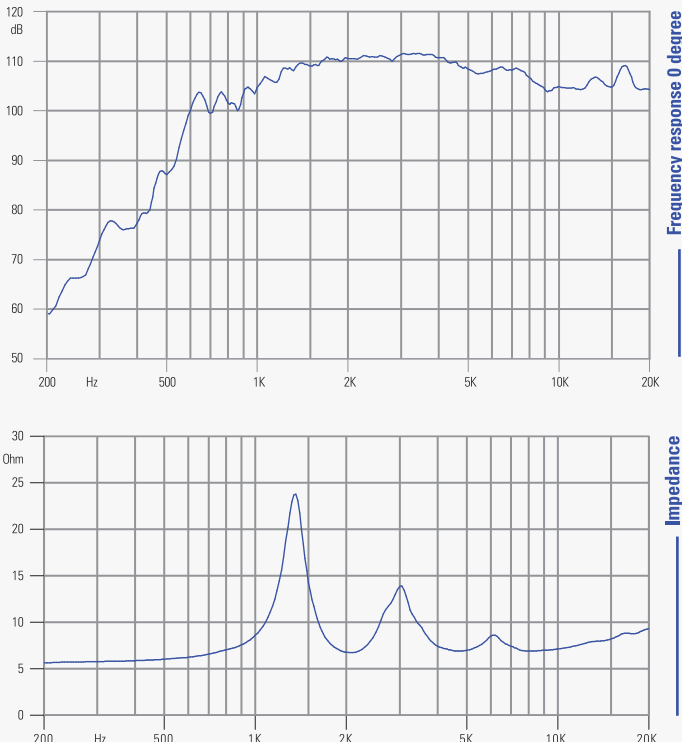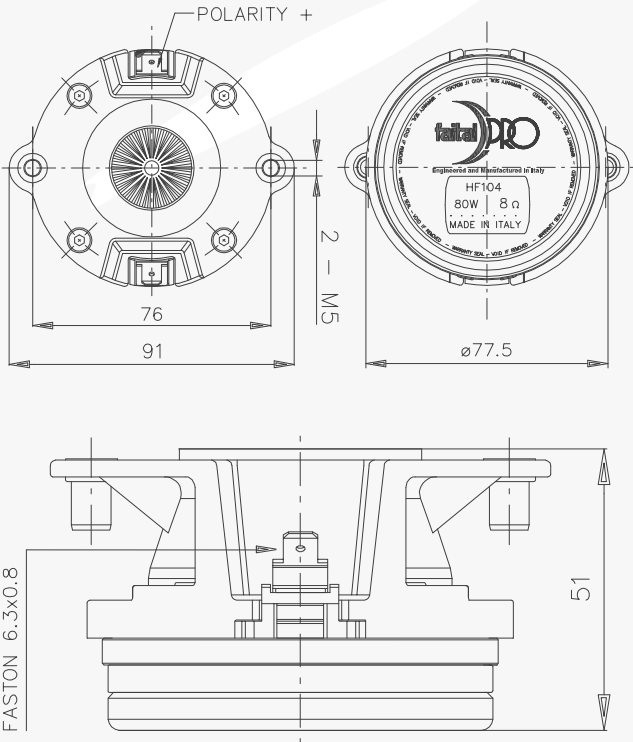

# HF105

1" - 40 W - 107 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	91 mm (3.58 in)
180° Mounting Holes Diameter (2xM5)	76 mm (2.99 in)
Depth	61 mm (2.40 in)
Net Weight	1.1 kg (2.4 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	1.2 kg (1.5 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.7 Ω
AES Power Handling (1)	40 W
Maximum Power Handling (2)	80 W
Minimum Crossover Frequency (3)	1.7 kHz
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	1.4÷20 kHz
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.5 T
Magnet	Ferrite Ring
Re	5.5 Ω
Phase Plug Design	Radial
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	0.26 dm³ (0.009 ft³)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The driver's exit coincides with the end of the phase plug, there is no adaptation throat.

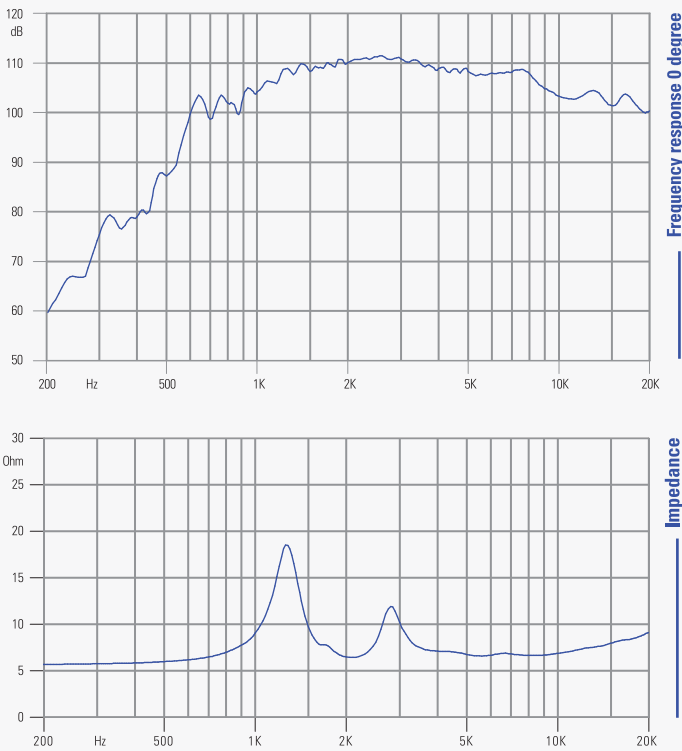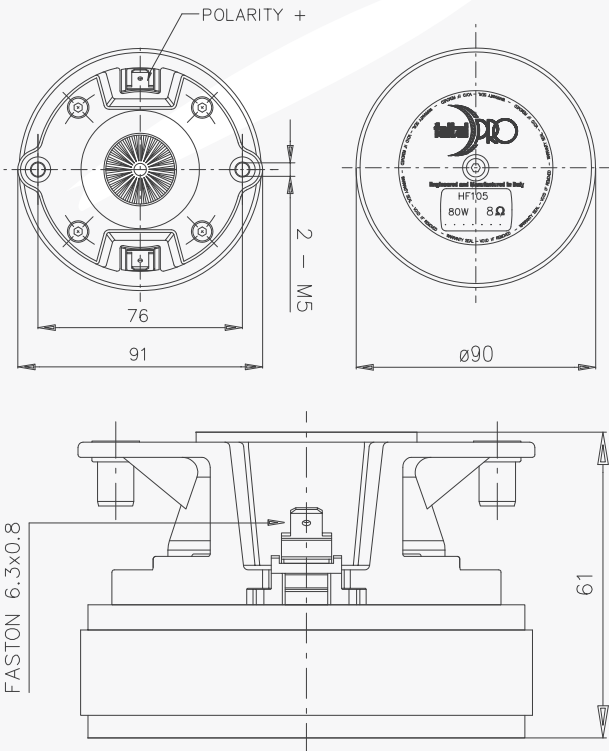

# HF111

1" - 40 W - 107 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	90 mm (3.54 in)
180° Mounting Holes Diameter (2xM6)	76 mm (2.99 in)
Depth	47 mm (1.85 in)
Net Weight	1.05 kg (2.3 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	1.3 kg (2.9 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
AES Power Handling (1)	40 W
Maximum Power Handling (2)	80 W
Minimum Crossover Frequency (3)	2 kHz
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	2÷20 kHz
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	2.2 mm (0.09 in)
Magnetic Gap Depth	2.4 mm (0.09 in)
Flux Density	1.6 T
Magnet	Ferrite Ring
Re	5.5 Ω
Phase Plug Design	Annular
Exit Angle (5)	18° Conical
NET Air Volume filled by HF Driver	0.225 dm³ (0.008 ft³)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

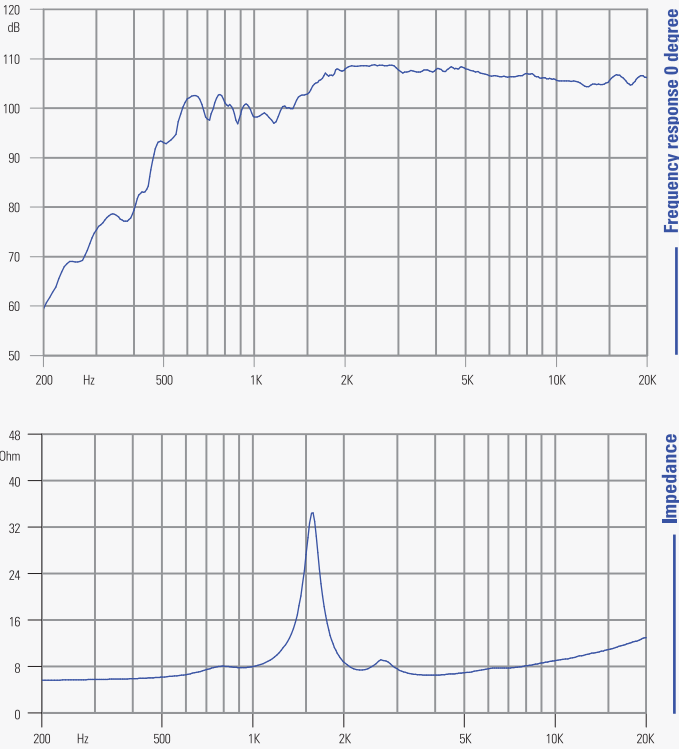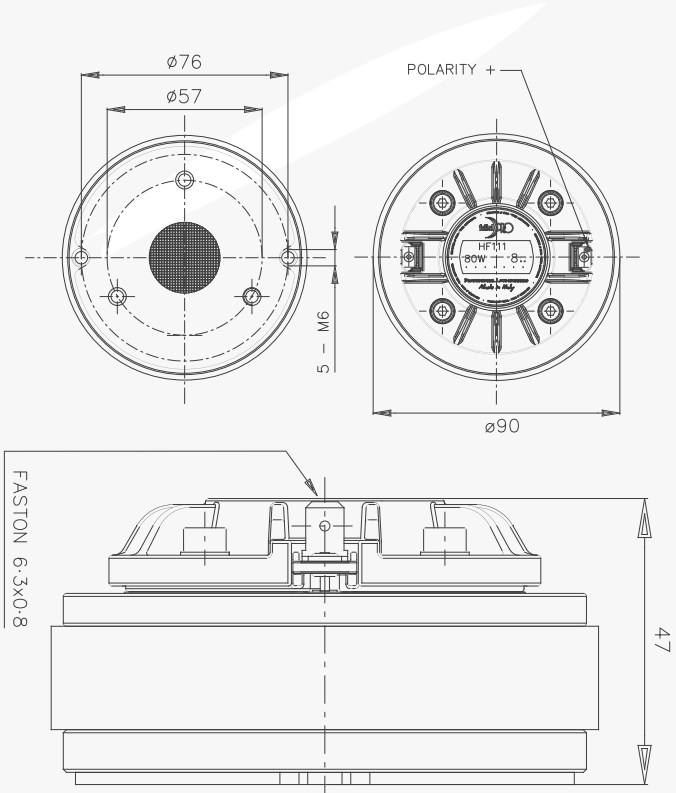



# HF102

1" - 30 W - 107 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	91 mm (3.58 in)
180° Mounting Holes Diameter (2xM5)	76 mm (2.99 in)
Depth	43 mm (1.69 in)
Net Weight	300 g (0.7 lb)
Shipping Box	98 x 90 x 64 mm
(Single Carton Box)	(3.9 x 3.5 x 2.5 in)
Shipping Weight	330 g (0.72 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) Ferrofluid added in air gap.
  - (6) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
AES Power Handling (1)	30 W
Maximum Power Handling (2)	60 W
Minimum Crossover Frequency (3)	2.6 kHz
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	1.8÷20 kHz
Voice Coil Diameter	25 mm (0.98 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	1.7 mm (0.07 in)
Magnetic Gap Depth (5)	2 mm (0.08 in)
Flux Density	1.3 T
Magnet	Neodymium Ring
Re	6 Ω
Phase Plug Design	Radial
Exit Angle (6)	9° Conical
NET Air Volume filled by HF Driver	0.1 dm³ (0.004 ft³)

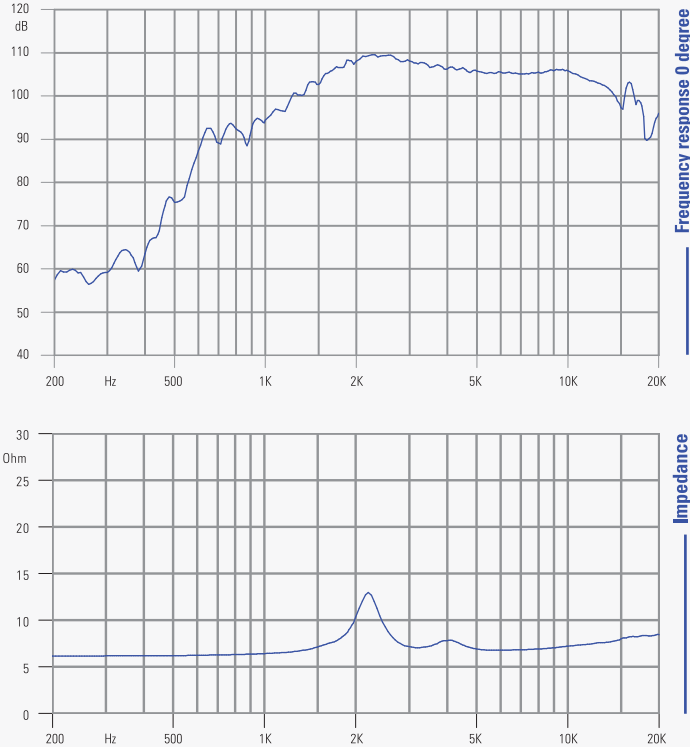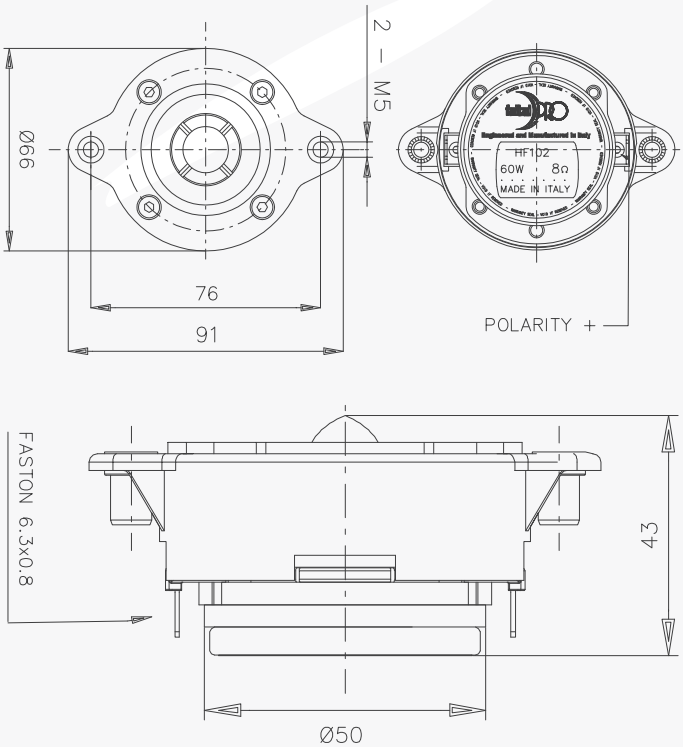

# HF100

1" - 30 W - 108 dB





NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Overall Diameter	108 mm (4.02 in)
180° Mounting Holes Diameter (2xM5)	76 mm (2.99 in)
Depth	55 mm (2.17 in)
Net Weight	830 g (1.8 lb)
Shipping Box	147 x 130 x 82 mm
(Single Carton Box)	(5.8 x 5.1 x 3.2 in)
Shipping Weight	862 g (1.90 lb)

- NOTES:** Driver mounted on a 1" 50° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
  - (2) Maximum power is defined as 3 dB greater than nominal power.
  - (3) 12 dB/oct or higher slope high-pass filter.
  - (4) Averaged within the frequency range.
  - (5) Ferrofluid added in air gap.
  - (6) The phase plug is recessed from the driver's exit which is at the end of a conical adaptation horn.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power Handling (1)	30 W
Maximum Power Handling (2)	60 W
Minimum Crossover Frequency (3)	2 kHz
Sensitivity (1W/1m) (4)	108 dB
Frequency Range	1.5÷20 kHz
Voice Coil Diameter	25 mm (0.98 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Dome
Winding Depth	1.7 mm (0.07 in)
Magnetic Gap Depth (5)	2 mm (0.08 in)
Flux Density	1.7 T
Magnet	Ferrite Ring
Re	6 Ω
Phase Plug Design	Radial
Exit Angle (6)	9° Conical
NET Air Volume filled by HF Driver	0.25 dm³ (0.009 ft³)

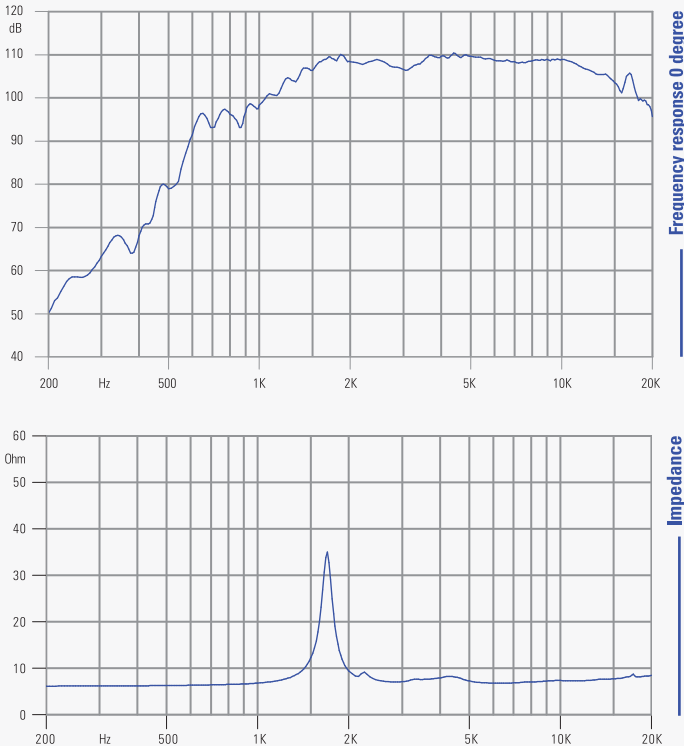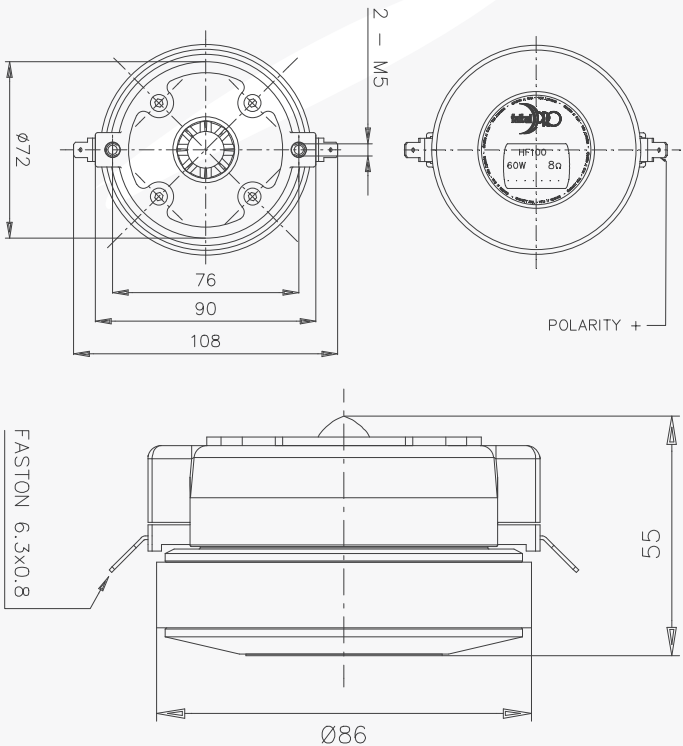

# FD371

37 mm - 35 W - 107 dB



NOMINAL SPECIFICATIONS




Overall Diameter	115.2/102 mm (4.54/4.0 in)
Bolt Circle Diameter	107 mm (4.21 in)
Baffle Cutout Diameter	91 mm (3.58 in)
Depth	79 mm (3.11 in)
Flange and gasket Thickness	5.5 mm (0.22 in)
Net Weight	1.25 kg (2.8 lb)
Shipping Box	150 x 123 x 102 mm
(Single Carton Box)	(5.9 x 4.8 x 4.0 in)
Shipping Weight	1.3 kg (2.9 lb)

NOTES:

- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
AES Power Handling (1)	35 W
Maximum Power Handling (2)	70 W
Minimum Crossover Frequency (3)	2.6 kHz
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	2.6÷20 kHz
Dispersion Angle	40°
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.5 T
Magnet	Ferrite Ring
Re	5.5 Ω
Exit Angle	N/A
NET Air Volume filled by HF Driver	0.3 dm³ (0.011 ft³)

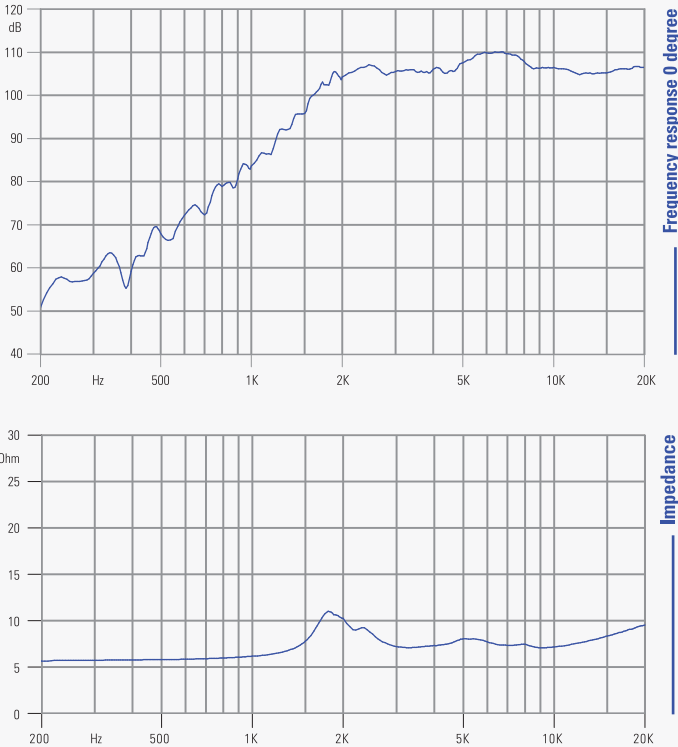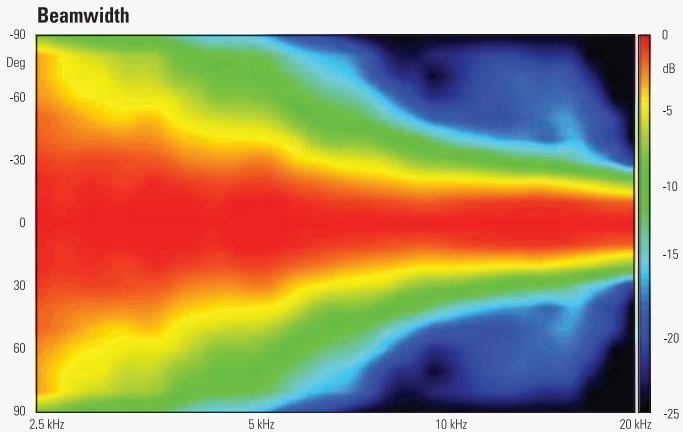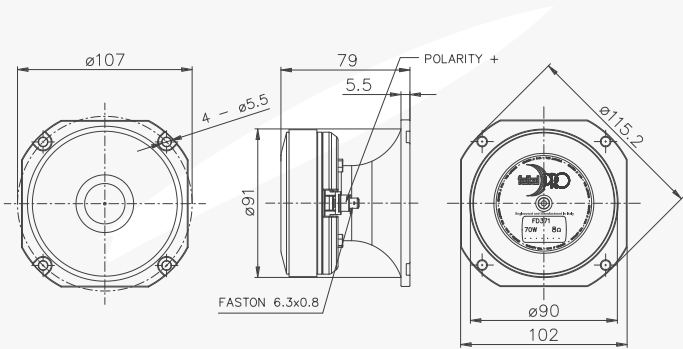

# FD375

37 mm - 35 W - 107 dB



NOMINAL SPECIFICATIONS




Overall Diameter	115.2/102 mm (4.54/4.0 in)
Bolt Circle Diameter	107 mm (4.21 in)
Baffle Cutout Diameter	91 mm (3.58 in)
Depth	79 mm (3.11 in)
Flange and gasket Thickness	5.5 mm (0.22 in)
Net Weight	1.24 kg (2.7 lb)
Shipping Box	150 x 123 x 102 mm
(Single Carton Box)	(5.9 x 4.8 x 4.0 in)
Shipping Weight	1.3 kg (2.9 lb)

NOTES:

- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	6.6 Ω
AES Power Handling (1)	35 W
Maximum Power Handling (2)	70 W
Minimum Crossover Frequency (3)	2.6 kHz
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	2.6÷20 kHz
Dispersion Angle	40°
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.5 T
Magnet	Ferrite Ring
Re	5.5 Ω
Exit Angle	N/A
NET Air Volume filled by HF Driver	0.3 dm³ (0.011 ft³)

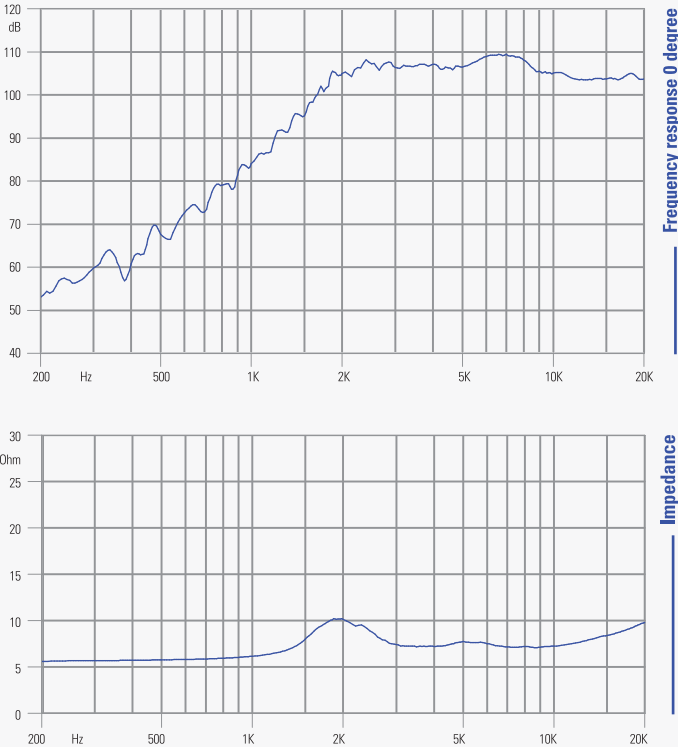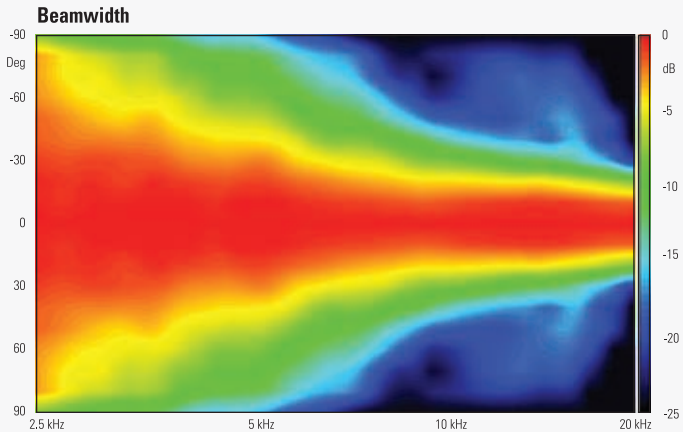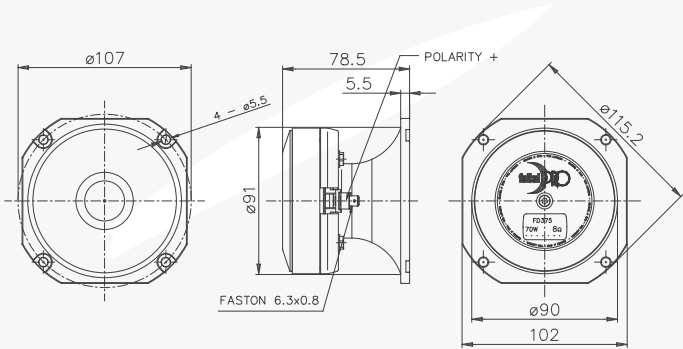



# HMF200

2" - 40 W - 108 dB





NOMINAL SPECIFICATIONS

Throat Diameter	50.8 mm (2 in)
Overall Diameter	144 mm (5.67 in)
90° Mounting Holes Diameter (4xM6)	102 mm (4.02 in)
Depth	77 mm (3.03 in)
Net Weight	1.65 kg (3.6 lb)
Shipping Box	185 x 170 x 122 mm
(Single Carton Box)	(7.3 x 6.7 x 4.8 in)
Shipping Weight	1.9 kg (4.2 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 Ω
Minimum Impedance	7 Ω
AES Power Handling (1)	40 W
Maximum Power Handling (2)	80 W
Minimum Crossover Frequency (3)	0.45 kHz
Sensitivity (1W/1m) (4)	108 dB
Frequency Range	0.45÷9 kHz
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Al
Former Material	Kapton
Diaphragm Material	Paper
Diaphragm Shape	Double Edge Cone
Winding Depth	2.6 mm (0.10 in)
Magnetic Gap Depth	3.6 mm (0.14 in)
Flux Density	2.1 T
Magnet	Neodymium Ring
Re	5.5 Ω
Phase Plug Design	Annular
Exit Angle (5)	Combined Exit
NET Air Volume filled by HF Driver	1.25 dm³ (0.044 ft³)

- NOTES:** Driver Mounted on a 2" 90° x 40° Al horn
- (1) 2 Hours Test According to AES 2-1984 Rev. 2003
- (2) Maximum power is defined as 3 dB greater than nominal power.
- (3) 12 dB/oct or higher slope high-pass filter.
- (4) Averaged within the frequency range.
- (5) The driver's exit coincides with the end of the phase plug, there is no adaptation throat.

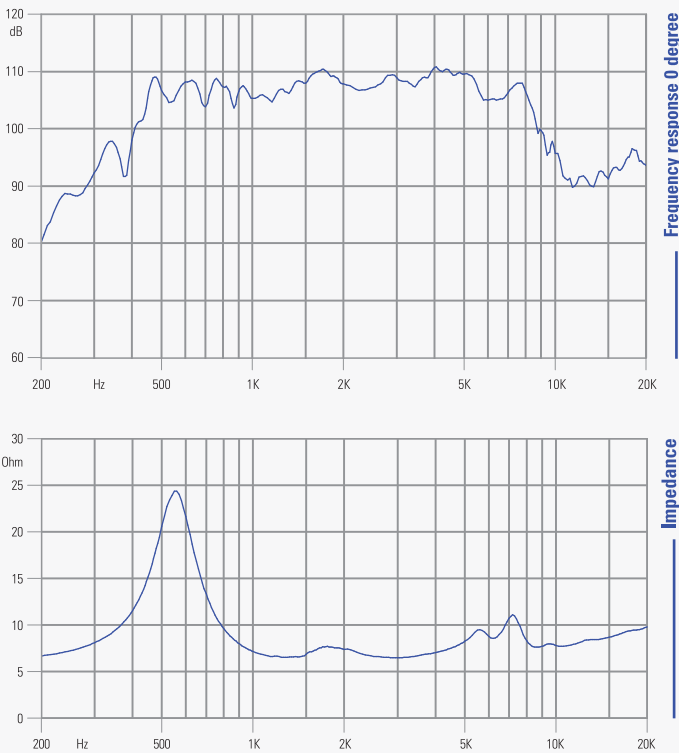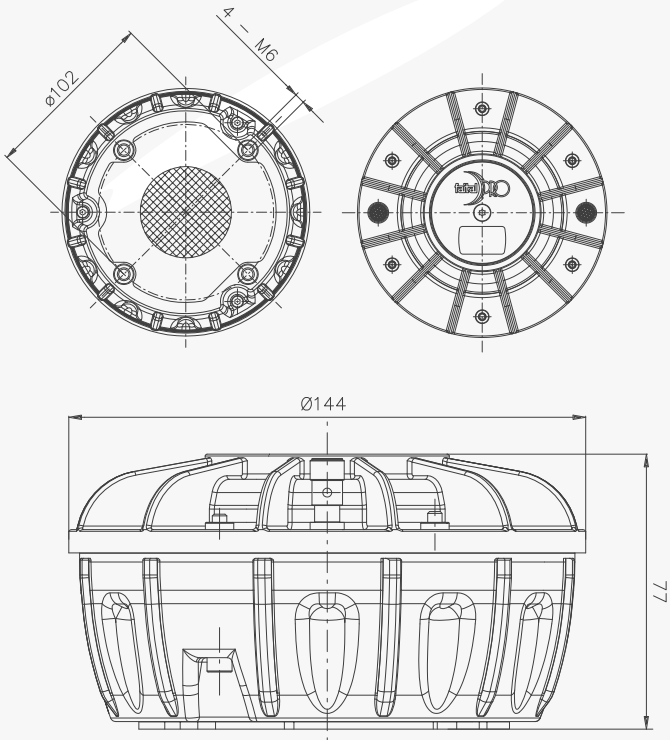

# HF HORNS

## **PRODUCTION AND AVAILABILITY**

Faital's 50 years experience in loudspeaker manufacturing means that every FaitalPRO driver is manufactured combining superb craftsmanship with the latest automation and industrial technologies. All our products are completely designed and manufactured in Italy. Quality and on time delivery are top priorities for our team.

PC/ABS HF HORN

# LTH142






1.4" - TRACRIX

## NOMINAL SPECIFICATIONS

Throat Diameter	35.6 mm (1.4 in)
Frequency Range	0.5÷18 kHz
Recommended Crossover Frequency (1)	0.8 kHz
Horizontal Nominal Coverage (-6 dB) (2)	60°
Vertical Nominal Coverage (-6 dB) (2)	50°
Directivity Index (2)(3)	9.5 dB
Material	PC/ABS
Mouth Height	240 mm (9.5 in)
Mouth Width	350 mm (13.8 in)
Depth	233 mm (9.2 in)
Mouth Mounting Holes (4x)	6.5 mm (0.26 in)
Net Weight	890 g (1.96 lb)
Shipping Box	380 x 255 x 245 mm
(Single Carton Box)	(15.0 x 10.0 x 9.6 in)
Shipping Weight	1.44 kg (3.17 lb)
NET Air Volume filled by HF Horn	2.5 dm³ (0.088 ft³)

### NOTES:

- (1) 4π sr acoustic loading
- (2) Average value in frequency range: 2÷16 kHz
- (3) Average value on horizontal and vertical planes

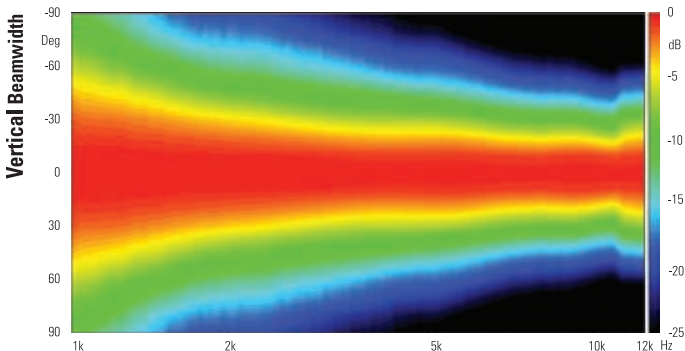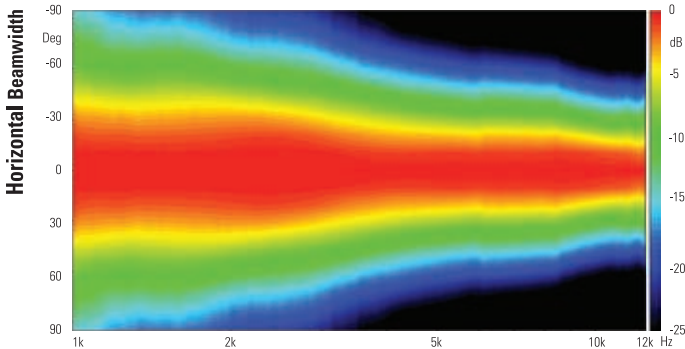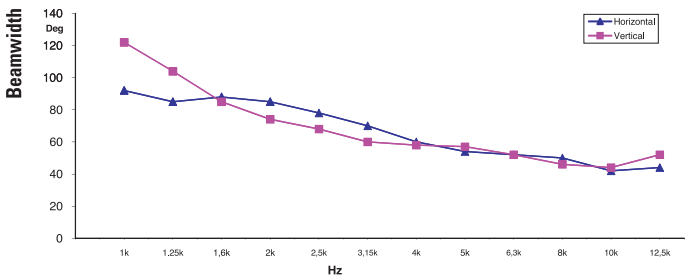

ALUMINUM HF HORN

# LTH102






1" - TRACRIX

## NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Frequency Range	0.8÷20 kHz
Recommended Crossover Frequency (1)	1 kHz
Horizontal Nominal Coverage (-6 dB) (2)	60°
Vertical Nominal Coverage (-6 dB) (2)	50°
Directivity Index (2)(3)	9.5 dB
Material	Al
Mouth Height	189 mm (7.44 in)
Mouth Width	235 mm (9.25 in)
Depth	171.6 mm (6.76 in)
Mouth Mounting Holes (4x)	6.5 mm (0.26 in)
Net Weight	1.2 kg (2.65 lb)
Shipping Box	268 x 207 x 185 mm
(Single Carton Box)	(10.55 x 8.15 x 7.28 in)
Shipping Weight	1.45 kg (3.20 lb)
NET Air Volume filled by HF Horn	1.1 dm³ (0.039 ft³)

### NOTES:

- (1) 4π sr acoustic loading
- (2) Average value in frequency range: 2÷16 kHz
- (3) Average value on horizontal and vertical planes

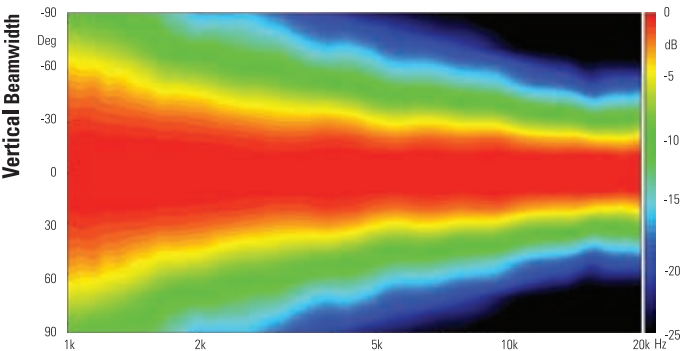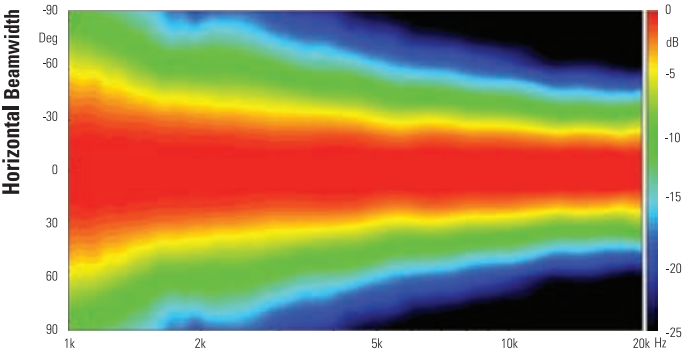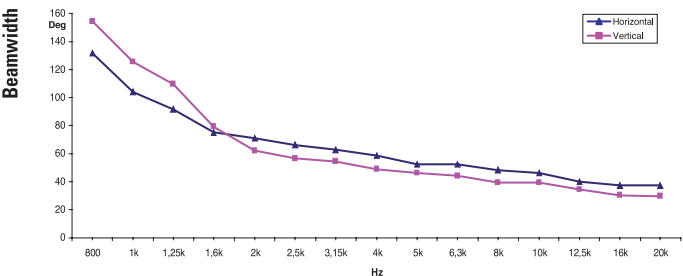

ALUMINUM HF HORN

STH100






1" - TRACTRIX

NOMINAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Frequency Range	1÷20 kHz
Recommended Crossover Frequency (1)	1.4 kHz
Horizontal Nominal Coverage (-6 dB) (2)	80°
Vertical Nominal Coverage (-6 dB) (2)	70°
Directivity Index (2)(3)	8 dB
Material	Al
Mouth Height	120 mm (4.72 in)
Mouth Width	180 mm (7.09 in)
Depth	85.9 mm (3.38 in)
Mouth Mounting Holes (4x)	6.5 mm (0.26 in)
Net Weight	460 g (1.01 lb)
Shipping Box	208 x 135 x 107mm
(Single Carton Box)	(8.19 x 5.31 x 4.21 in)
Shipping Weight	567 g (1.25 lb)
NET Air Volume filled by HF Horn	0.4 dm³ (0.014 ft³)


NOTES:

- (1) 4π sr acoustic loading
- (2) Average value in frequency range: 2÷16 kHz
- (3) Average value on horizontal and vertical planes

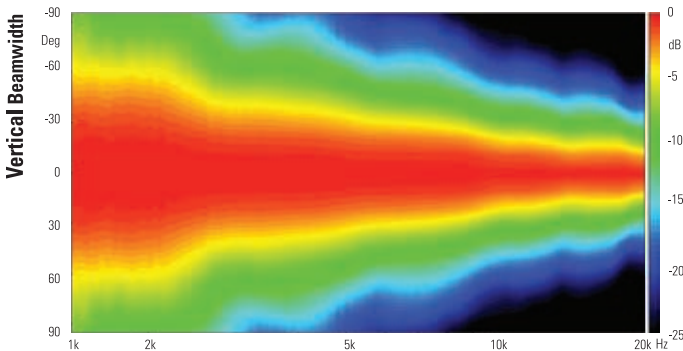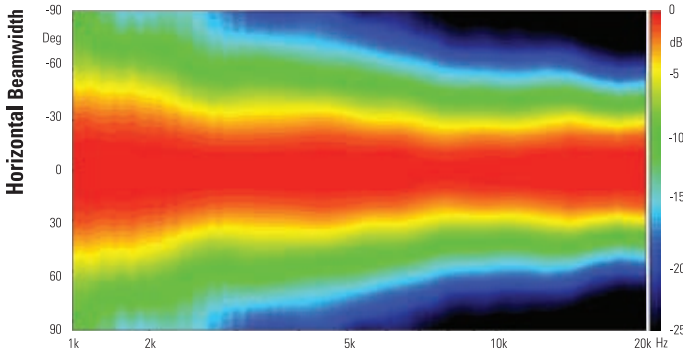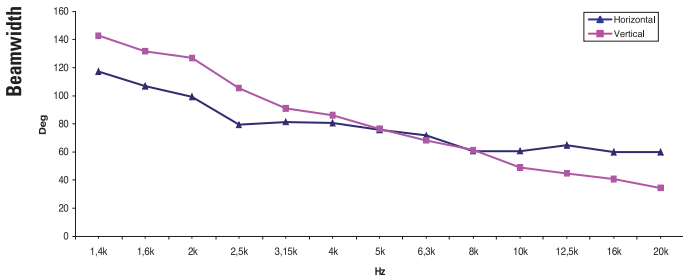

ALUMINUM HF HORN

WG141

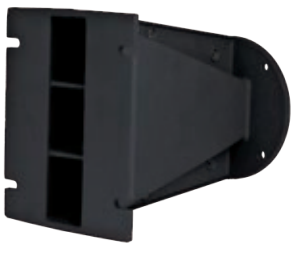




1.4" - WAVE GUIDE

NOMINAL SPECIFICATIONS

Throat Diameter	36.5 mm (1.4 in)
Frequency Range	0.8÷20 kHz
Recommended Crossover Frequency (1)	0.8 kHz
Horizontal Nominal Coverage (-6 dB) (2)	110°
Material	Al
Mouth Height	163 mm (6.4 in)
Mouth Width	130 mm (5.1 in)
Depth	200 mm (7.9 in)
Mouth Mounting Holes (4x)	7 mm (0.28 in)
Net Weight	1.4 kg (3.1 lb)
Shipping Box	232 x 179 x 142 mm
(Single Carton Box)	(9.1 x 7.0 x 5.6 in)
Shipping Weight	1.65 kg (3.6 lb)
NET Air Volume filled by HF Horn	1.0 dm³ (0.035 ft³)

NOTES:

- (1) 4π sr acoustic loading
  - (2) Average value in frequency range: 2÷16 kHz
- Sold only in combination with a FaitalPRO 1.4" HF Driver

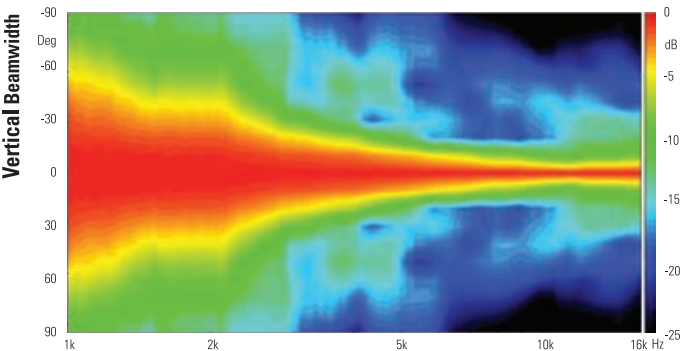
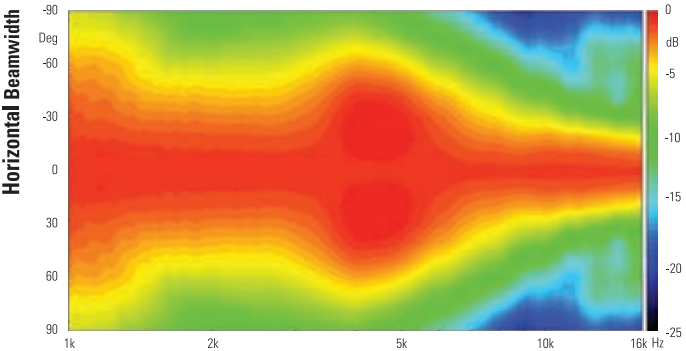
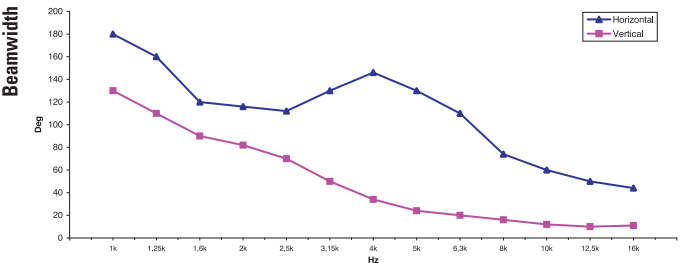






Throat Diameter	25.4 mm (1 in)
Frequency Range	1÷20 kHz
Recommended Crossover Frequency (1)	1.6 kHz
Horizontal Nominal Coverage (-6 dB) (2)	140°
Material	Al
Mouth Height	122.3 mm (4.81 in)
Mouth Width	86 mm (3.39 in)
Depth	110 mm (4.33 in)
Mouth Mounting Holes (4x)	6.5 mm (0.26 in)
Net Weight	480 g (1.06 lb)
Shipping Box	150 x 123 x 102 mm
(Single Carton Box)	(5.91 x 4.84 x 4.02 in)
Shipping Weight	500 g (1.10 lb)
NET Air Volume filled by HF Horn	0.35 dm³ (0.012 ft³)

(1) 4π sr acoustic loading  
(2) Average value in frequency range: 2÷16 kHz  
Sold only in combination with a FaitalPRO 1" HF Driver

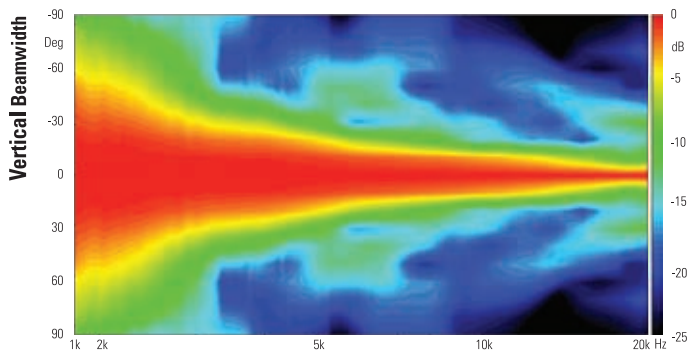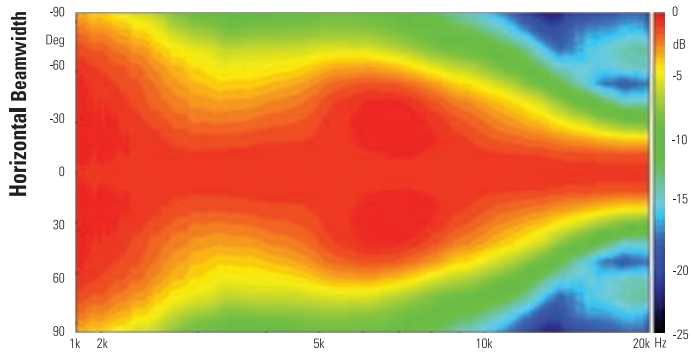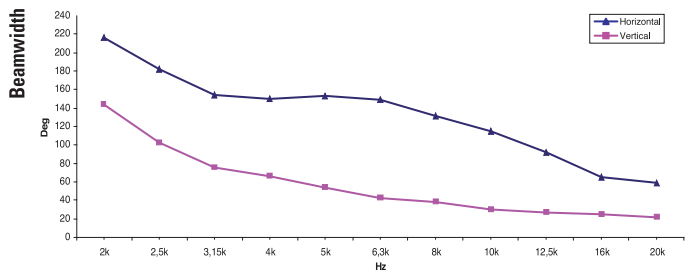

## NOTES



**Faisal S.p.A.**

Via Bruno Buozzi, 12  
20097 San Donato Milanese (MI) - Italy

**faisal.com**



**FAITALPRO.COM**



**20 YEARS**  
OF SOUND INNOVATION

FaisalPRO is a trade mark of Faisal S.p.A.  
With the goal of maintaining up to date the opportunities offered to its  
clients, Faisal reserves the right of modifying technical characteristics  
and product types without notice.

**Ver. 01-26 | P/N: 20000530**